

CRYSTORAMA

1958


95 Cantiague Rock Road, Westbury NY 11590

Ph: 516.931.9090 fax: 516.931.1254

info@crystorama.com www.crystorama.com


MODEL#: 8208-FB

ASSEMBLY AND DRESSING INSTRUCTION

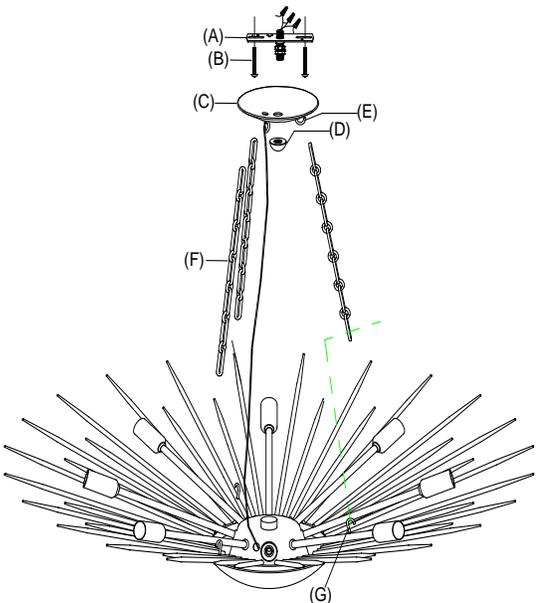


PARTS ENCLOSED

- (A) Mounting strap
- (B) Mounting screw
- (C) Canopy
- (D) Cap nut
- (E) Top loop
- (F) Chain
- (G) Hanger



All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.

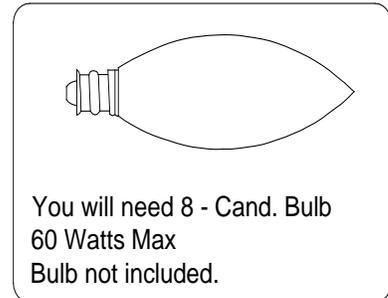

You will need 8 - Cand. Bulb
60 Watts Max
Bulb not included.

WARNINGS:

Turn off power (unplug from the wall outlet) before replacing the bulb(s), making sure the bulb(s) had sufficient time to cool down. DO NOT subject the lamp to any shock while lit as shattering of lamp may result.

TO ASSEMBLE:

1. Carefully remove all parts from the box and remove all plastic covering.
2. Turn off power to the junction box where the pendant will be installed.
3. Remove mounting strap (A) from canopy (C) by unscrewing cap nut (D).
4. Attach mounting strap (A) to ceiling outlet box and secure with mounting screws (B).
5. Insert top thread nipple in mounting strap (A).
6. Hook one end of chain (F) to the hanger (G) on light fixture, another end to top loop (E) on canopy (C) at desired height. Hanging chain (F) can be cut if need to adjust the height.
7. Gently pull wires from ceiling outlet box and allow the wires to hang.
8. Carefully inspect the pendant's two fixture wires. One has very fine ridges molded into the plastic covering - this is the NEUTRAL WIRE. The second wire's covering is smooth - this is the HOT WIRE. The bare wire is the GROUND WIRE.
9. Connect the GROUND WIRE from the fixture with the ground wire (usually bare) from your ceiling box using a wire nut. If your house does not have ground wire, then attach the GROUND WIRE from the fixture to the green grounding screw inside of the outlet box. IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME BE PROPERLY GROUNDED.
10. Connect the NEUTRAL WIRE from your fixture with the Neutral wire (usually white) from your ceiling box using a wire nut.
11. Connect the HOT WIRE from your fixture with the hot wire (usually black) from your outlet box using a wire nut. DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.
12. Tuck these wire connections neatly into the ceiling outlet box.
13. Slip canopy (C) to affixed mounting strap (A), letting the nipple on mounting strap (A) pass through the holes of canopy and secure with cap nut (D).

CRYSTORAMA

1958

95 Cantiague Rock Road, Westbury NY 11590

Ph: 516.931.9090 fax: 516.931.1254

info@crystorama.com www.crystorama.com

14. Insert the recommended 60-watt Type B bulbs (not included) into the threaded sockets.
15. Restore power to the junction box and test the pendant fixture.
16. Assembly is complete.

CARE INSTRUCTIONS:

To clean, use a soft cloth only. DO NOT use any chemical or abrasive cleaners.