
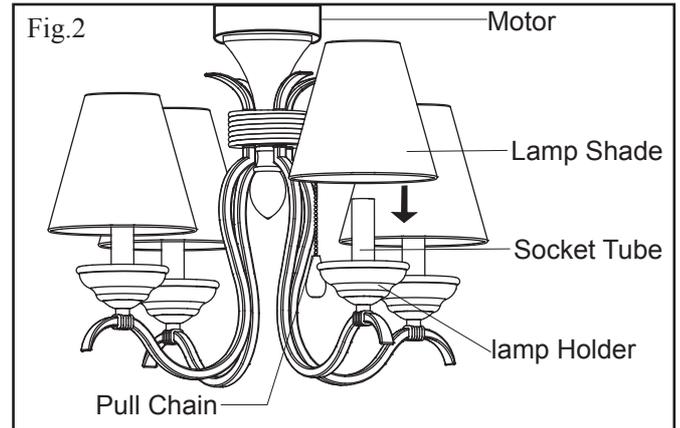


ASSEMBLY AND INSTALLATION INSTRUCTIONS

LK38354

WARNING: BE SURE TO SHUT OFF POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE INSTALLING OR SERVICING THIS FIXTURE.

**NOTE: 1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. The combined weight of your ceiling fan and light kit cannot exceed 35 pounds unless additional support is provided for the fan.**


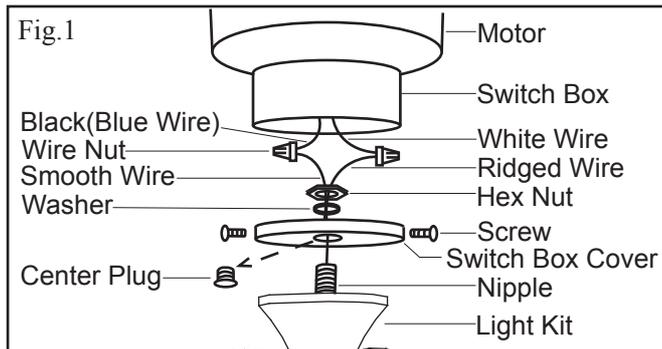


For Light Kit:

1. Remove the switch box cover from the switch box of the fan by loosening the three screws. □
2. Unscrew the center plug from the switch box cover and discard it.
3. Thread the wires through the switch box cover, washer and hex nut, then attach the nipple of the light kit to the hole of the switch box cover and secure it with the washer and hex nut.
4. Pull out the wires from the switch box. Make wire connections using the wire nuts:
 - The smooth (marked) wire from the light kit to the black or blue wire from the fan.
 - The ridged (unmarked) wire from the light kit to the white wire from the fan.
 - Carefully tuck the wires back into the switch box cover.
5. Restore the switch box cover back to the switch box using the three screws.
6. Put the lamp shade on the socket tube. (See Fig.2)
7. Install bulbs (not included). See relamping label at socket area or packaging for maximum allowed wattage.
8. Turn on the power at the main fuse or circuit breaker box.
(You can control the lights with the pull chain.)

□

For Chandelier:

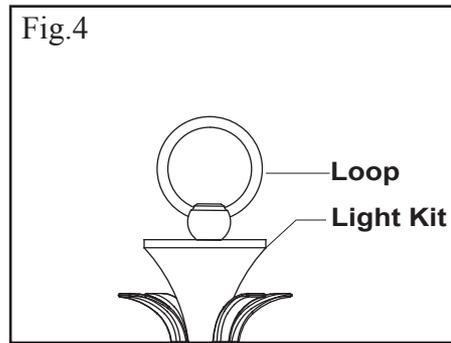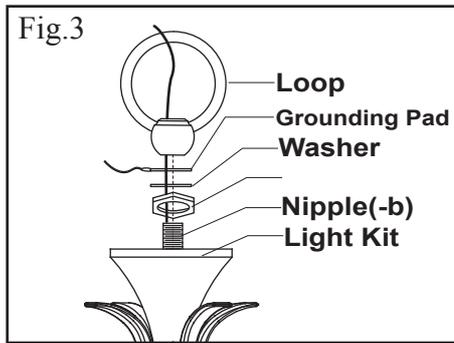

1. Attach nipple(-a) to the mounting strap, then secure it with a washer and hex nut.
2. Attach the mounting strap to the outlet box by using two mounting screws.
3. Take out the cap from the hardware package for the chandelier.
4. Thread the fixture wire through the cap, washer, grounding pad and loop. Then attach the cap onto the light kit by inserting nipple(-b) and secure it with the washer, grounding pad and loop. (See Fig.3 & Fig.4)
5. Choose the length of the chain you need, then weave the fixture wire and the fixture grounding wire through the chain links. Connect one end of the chain with the loop using a loop lock.
6. Secure the top loop to nipple(-a).
7. Thread the fixture wire and fixture grounding wire through the collar, canopy, top loop, nipple(-a) and mounting strap.
8. Connect the other end of the chain with the top loop using the other loop lock.
9. Pull out the outlet wires and the house grounding wire from the outlet box. Make wire connections using the wire nuts:
 - The smooth wire (marked) from fixture to black wire from power source.
 - The ridged wire (unmarked) from fixture to white wire from power source.
 - Attach the fixture grounding wire to the mounting strap with the green grounding screw. Then connect it to the house grounding wire with a wire nut.
 Carefully tuck the wires back into the outlet box.
10. Attach the canopy to the mounting strap by inserting the top loop and secure it with the collar.
11. Put the lamp shade on the socket tube.
12. Install bulbs (not included). See relamping label at socket area or packaging for maximum allowed wattage.
13. Turn on the power at the main fuse or circuit breaker box. (You can control the lights with the pull chain.)

