



Family: Casa | Item No. 3506 OL



Drawing 1 - Fixture Assembly

▼ start here

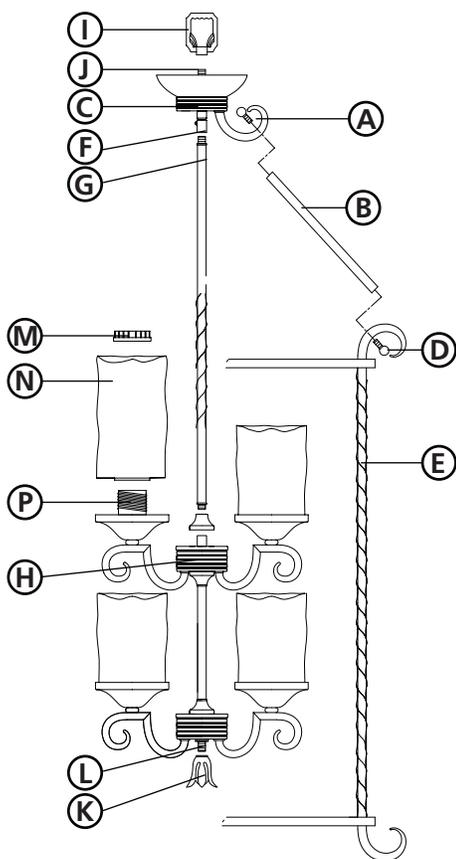

1

1. Find a clear area in which you can work.
2. Unpack fixture and glass from carton.
3. Carefully review instructions prior to assembly.

***** The construction of this fixture will be accomplished by first assembling the main body of the fixture, making all necessary electrical connections, hanging the fixture from the ceiling, and then installing the glass.**

SAFETY WARNING: READ WIRING AND GROUNDING INSTRUCTIONS (I.S. 18) AND ANY ADDITIONAL DIRECTIONS. TURN POWER SUPPLY OFF DURING INSTALLATION. IF NEW WIRING IS REQUIRED, CONSULT A QUALIFIED ELECTRICIAN OR LOCAL AUTHORITIES FOR CODE REQUIREMENTS.

2

1. To assemble fixture, connect fixture body (H) to top unit (C), by screwing nipple (G) into swivel (F).
2. Using ball screw (A) connect square tube (B) to top assembly (C).
3. Using ball screw (D) connect square tube (B) to lantern (E).
4. Repeat steps 2-3 for remaining tubes (B).
5. Holding the wires tight, screw loop (I) onto nipple (J).
6. Screw finial (K) onto nipple (L).
7. Please refer to the hanging instruction sheet (I.S. 19) provided to hang fixture. Then refer back to this sheet to install fixture glass.

3

1. To install glass, remove socket ring (M) from socket (P).
2. Slip glass shade (N) over socket (P).
3. Thread socket ring (M) onto socket (P) to secure glass (N) and hand tighten only.
Note: Using a tool to tighten may cause damage to glass.
4. Repeat steps 1-3 for remaining glass.
5. Fixture can now be lamped accordingly.

Note: Maximum wattage for 3506 fixture is 100 watts per bulb.

2.7.08