



Family: Casa | Item No. 3508 OL

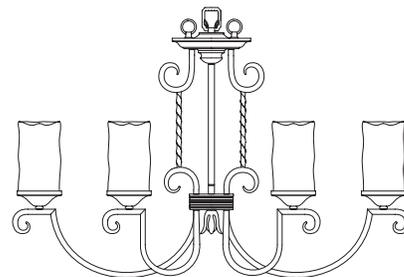

Drawing 1 - Glass Installation

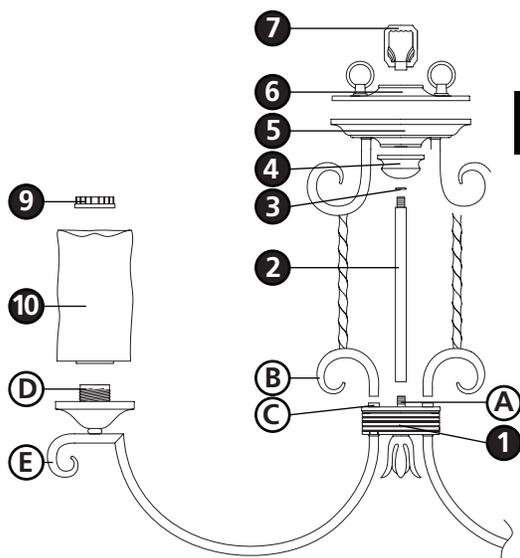

▼ start here

1

1. Find a clear area in which you can work.
2. Unpack fixture and glass from carton.
3. Carefully review instructions prior to assembly.

*** The construction of this fixture will be accomplished by first assembling the main body of the fixture, installing the mounting hardware, making all necessary electrical connections, hanging the fixture from the ceiling, and then installing the glass.

SAFETY WARNING: READ WIRING AND GROUNDING INSTRUCTIONS (I.S. 18) AND ANY ADDITIONAL DIRECTIONS. TURN POWER SUPPLY OFF DURING INSTALLATION. IF NEW WIRING IS REQUIRED, CONSULT A QUALIFIED ELECTRICIAN OR LOCAL AUTHORITIES FOR CODE REQUIREMENTS.

2

1. To assemble main body, thread center stem (2) onto nipple (A) and tighten.
2. Thread ring nut (3) down onto center stem (2).
3. Slip bottom cap (4) onto center stem (2).
4. Slip scroll and canopy assembly (5) onto center stem (2). Making sure the end of scroll (B) set into square ring (C).
5. Slip canopy cover (6) onto center stem (2). Making sure the edges fit over the edge of scroll and canopy assembly (5).
6. Thread loop (7) onto end of center stem (2) and tighten to secure assembly.
7. Spread arms (E) until they are equally spaced 60 degrees apart.
8. Please refer to the hanging instruction sheet (I.S. 19-75) provided to hang fixture. Then refer back to this sheet to install glass.

3

1. To install glass, remove socket ring (9) from socket (D).
2. Slip glass (10) over socket (D).
3. Thread socket ring (9) back onto socket (D) to secure glass (10).
4. Fixture can now be lamped accordingly.

Note: Maximum wattage for 3508 fixture is 100 watts per bulb.

2.7.08