


Assembly instruction for 3614

1. Unpack fixture and take body assembly (1) and attach upright (2) to ring scroll (A) and canopy loop (B) using chain links (3) provided. (see sketch 1 below)
2. Attach 10 ft. of chain (5) to loop (C). Weave wire through chain.
3. Thread center finial (4) onto top of arm assembly center body.
4. Thread nipple (7) into bottom of cluster assembly (D).
5. Lamp fixture with bulbs (not included) at this point. Maximum wattage per lamp is 60 watts.
6. Slip glass (6) onto fixture. While holding glass in place slip bottom finial (8) over nipple (7) and up to bottom of glass (6). Thread bottom loop (9) onto end of nipple (7). Do not over tighten. This could cause the glass to fracture.

Fixture is ready for mounting. Please follow instructions provided.

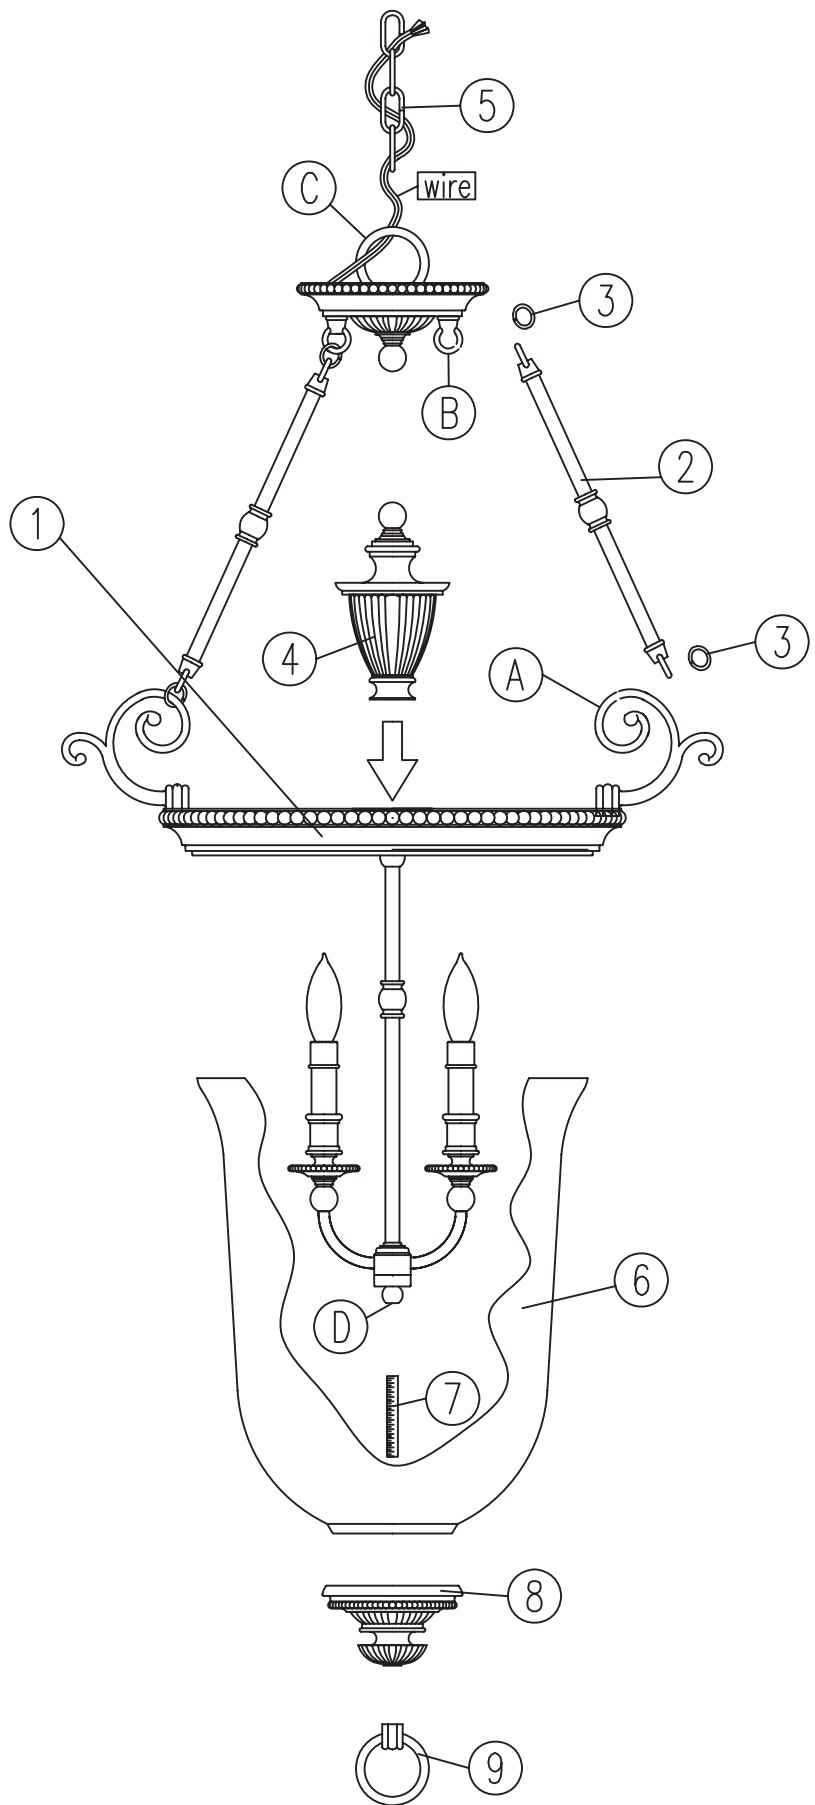

sketch 1

expand chain link (3). slip through loop (E) and over scroll (A).

