



Family: Casa | Item No. 4018 OL




▼ start here

Drawing 1 - Arm Spread



Drawing 2 - Fixture Assembly

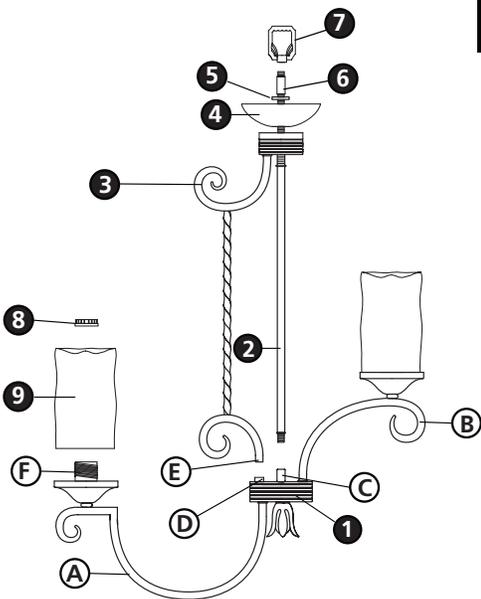

1

1. Find a clear area in which you can work.
2. Unpack fixture and glass from carton.
3. Carefully review instructions prior to assembly.

***** The construction of this fixture will be accomplished by first assembling the main body of the fixture, installing the mounting hardware, making all necessary electrical connections, hanging the fixture from the ceiling and then installing the glass.**

SAFETY WARNING: READ WIRING AND GROUNDING INSTRUCTIONS (I.S. 18) AND ANY ADDITIONAL DIRECTIONS. TURN POWER SUPPLY OFF DURING INSTALLATION. IF NEW WIRING IS REQUIRED, CONSULT A QUALIFIED ELECTRICIAN OR LOCAL AUTHORITIES FOR CODE REQUIREMENTS.

2

1. Rotate the six lower arms (A) of the main body assembly (1) until they are equally spaced 60 degrees apart - See Drawing 1.
2. Rotate the top three arms (B) until they are equally spaced 120 degrees apart and also equally spaced between two of the lower arms (A).
3. Slip center stem (2) along wire and thread into coupler (C), located on top of the main body (1), and tighten.
4. Take center column assembly (3) and rotate arms until they are equally spaced 120 degrees apart. Then slip assembly along wire and slide over center stem (2). Making sure the bottom scrolls ends (D) fit over the square pegs (E) located on the top of the main body assembly (1), and also making sure scroll work on center column is aligned with the arms (A) on main body and equally spaced between the arms (B).
5. Slip top cap (4) along wire and over center stem (2).
6. Slip washer (5) along wire and over center stem (2).
7. Slip spacer (6) along wire and over center stem (2).
8. Slip loop (7) along wire and thread onto end of center stem (2) and tighten to secure center column assembly.
9. Fixture can now be installed. Please follow instruction sheet IS-19 provided. After installation return to this section for Glass installation instructions.

3

1. To install glass first remove socket ring (8) from socket (F).
2. Slip glass (9) over socket.
3. Thread socket ring (8) back onto socket (F) and tighten to secure glass.
4. Fixture can be lamped accordingly at this time.
5. Fixture is complete.

Note: Maximum wattage for 4018 fixture is 100 watts per bulb.

10.3.08