



Family: Mayflower | Item No. 4162 OB



Drawing 1 - Fixture Assembly

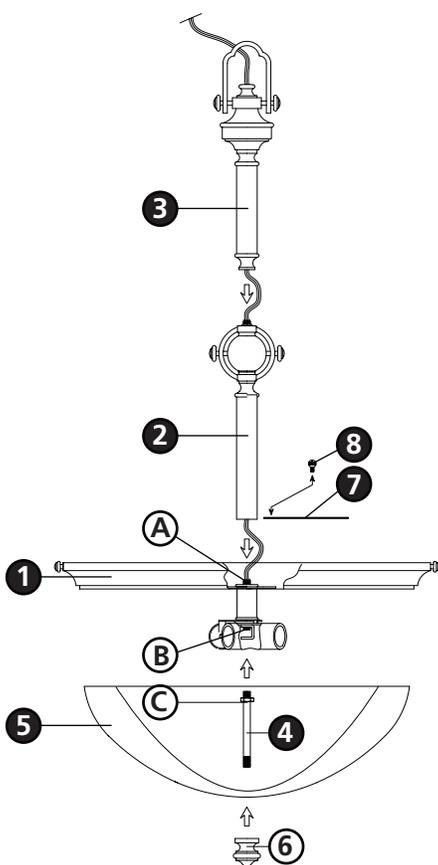

▼ start here

1

1. Find a clear area in which you can work.
2. Unpack fixture and glass from carton.
3. Carefully review instructions prior to assembly.

***** The construction of this fixture will be accomplished by first assembling the main body of the fixture, making all necessary electrical connections, hanging the fixture from the ceiling, and then installing the glass.**

2

SAFETY WARNING: READ WIRING AND GROUNDING INSTRUCTIONS (I.S. 18) AND ANY ADDITIONAL DIRECTIONS. TURN POWER SUPPLY OFF DURING INSTALLATION. IF NEW WIRING IS REQUIRED, CONSULT A QUALIFIED ELECTRICIAN OR LOCAL AUTHORITIES FOR CODE REQUIREMENTS.

3

1. To assemble fixture, slip bottom section of center column (2) along wire and thread onto nipple (A) located on the top of the body assembly (1).
2. Slip top section of center column (3) along wire and thread onto the top of section (2).
3. Attach bulb shield (7) by first removing screws (8) from top of body assembly (1).
4. Attach bulb shield using screws (8) removed in step 3.
5. Thread nipple (4) into coupler (B) approximately 1/4".
6. Thread hex nut (C) up against the base of coupler (B) and tighten to secure nipple (4).
7. Please refer to instruction sheet (I.S. 19) provided to hang fixture. Then refer back to this sheet to continue installation of this fixture.

4

1. Prior to installing glass, fixture can be lamped accordingly.
2. To install glass, slip nipple (4) through center hole of glass (5).
3. While holding glass (5) in place, thread finial (6) onto end of nipple (4) and hand tighten only.
Note: using a tool to tighten finial may cause damage to glass.

Note: Maximum wattage for 4162 fixture is 100 watts per bulb.

2.7.08