


Item No. 2302

Drawing 1 - Fixture Assembly

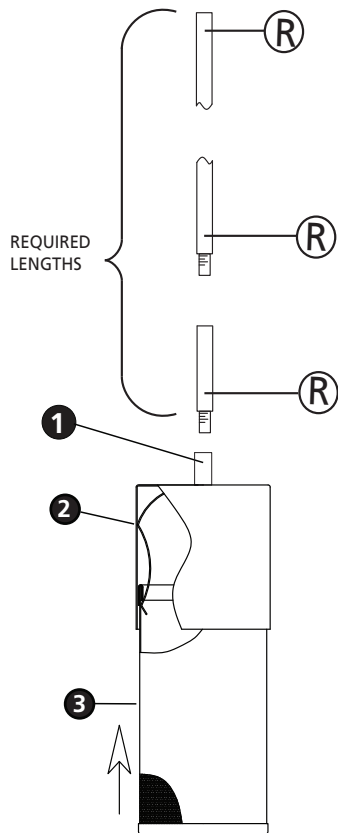

▼ start here

1

1. Find a clear area in which you can work.
2. Unpack fixture and glass from carton.
3. Carefully review instructions prior to assembly

*** The construction of this fixture will be accomplished by first assembling the main body, hanging the fixture, and then installing the fixture glass.

SAFETY WARNING: READ WIRING AND GROUNDING INSTRUCTIONS (I.S. 18) AND ANY ADDITIONAL DIRECTIONS. TURN POWER SUPPLY OFF DURING INSTALLATION. IF NEW WIRING IS REQUIRED, CONSULT A QUALIFIED ELECTRICIAN OR LOCAL AUTHORITIES FOR CODE REQUIREMENTS.

2

1. It will be necessary to determine the total length of rods (R) you will require to hang your fixture at the desired height. Fixture is supplied with 1 - 6" and 2 - 12" rods.
2. After determining the rod lengths needed, slip the first rod along the wire and thread into coupler (1). Continue to add rods as needed.
3. To finish installation of fixture please refer to instruction sheet (I.S. 2302MI) provided. Then refer back to this sheet to install glass.

3

SHADE INSTALLATION:


1. Slip mesh cylinder (3) into top of fixture making sure top edge engages clip (2). - see **Drawing 2**.

6.1.12

Family: Aria | Item No. 2302MI

▼ start here

Drawing 1 - Strap Detail



1

***** The construction of this fixture will be accomplished by first assembling the main body, determining the length of stem required, installing the mounting hardware, making all necessary electrical connections, and then hanging the fixture.**


NOTE: The fixture is supplied with 2 mounting options. Please determine which option will work best for your application.

Option 1: The fixture can be mounted directly to the swivel that is attached to the canopy. This installation holds the fixture in a fixed position but allows it to swivel 90 degrees in one direction.

Option 2: The fixture can be mounted with a chain link assembly between the swivel and stem assembly. This installation allows the fixture to swivel in any direction, and no limit on its range of motion.

Both installation options are explained below.

Drawing 2 - Option 1:

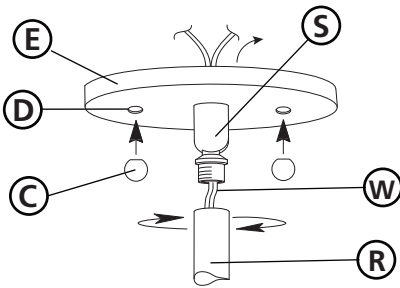

2

NOTE: This step is necessary for both mounting options.


1. Install screws (A) into mounting plate (B) - see **Drawing 1**.

- Be sure the holes into which the screws are threaded match the spacing of holes (D) in the canopy (E) - see **Drawings 1 and 2**.

2. Attach mounting plate (B) to junction box (J), using screws (G) provided and then slip supply wires through large center hole.

SAFETY WARNING: READ WIRING AND GROUNDING INSTRUCTIONS (I.S. 18) AND ANY ADDITIONAL DIRECTIONS. TURN POWER SUPPLY OFF DURING INSTALLATION. IF NEW WIRING IS REQUIRED, CONSULT A QUALIFIED ELECTRICIAN OR LOCAL AUTHORITIES FOR CODE REQUIREMENTS.

Drawing 3 - Option 2:

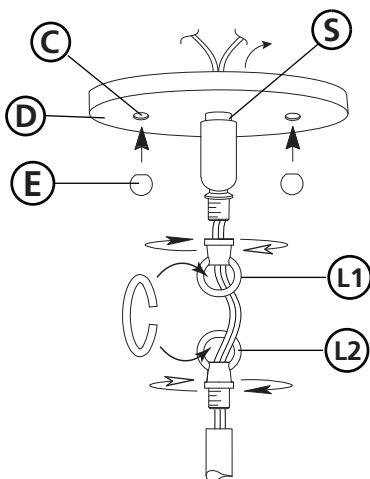

3

Option 1:

1. Slip wires (W) from fixture through center of swivel (S) - see **Drawing 2**.

2. Thread swivel with canopy into top of extension rod (R) and tighten.

3. After making all necessary electrical connections, to mount fixture to ceiling, slip holes (D) in canopy over screws (A) in mounting strap.

4. Thread ball knobs (C) onto end of screws (A) and tighten.

5. Refer to assembly instruction for shade attachment instructions.

4

Option 2:

1. Slip loop (L1) along fixture wire (W) and thread into top of the extension rod (R) - see **Drawing 3**.

2. Slip loop (L2) onto fixture wire (W).

3. Slip fixture wire through center of swivel (S), now thread loop (L2) onto end of swivel (S).

4. Open up chain link (CL) and slip loop (L1) and (L2) onto link. Close link.


5. To install fixture, make all necessary electrical connections.

6. To mount fixture to ceiling, slip holes (D) in canopy over screws (A) in mounting plate (B).

7. Thread ball knobs (C) onto end of screws (A) and tighten.

8. Refer to assembly instructions for shade attachment instructions.

Drawing 1 - Flush Mount



Drawing 2 - Chain Hung



Drawing 3 - Post-Mount



SAFETY WARNING: READ WIRING AND GROUNDING INSTRUCTIONS (I.S. 18) AND ANY ADDITIONAL DIRECTIONS. TURN POWER SUPPLY OFF DURING INSTALLATION. IF NEW WIRING IS REQUIRED, CONSULT A QUALIFIED ELECTRICIAN OR LOCAL AUTHORITIES FOR CODE REQUIREMENTS.

wiring instructions

Indoor Fixtures

1. Connect positive supply wire **(A)** (typically black or the smooth, unmarked side of the two-conductor cord) to positive fixture lead **(B)** with appropriately sized twist on connector - see **Drawings 1 or 2**.
2. Connect negative supply wire **(C)** (typically white or the ribbed, marked side of the two-conductor cord) to negative fixture lead **(D)**.
3. Please refer to the **grounding instructions** below to complete all electrical connections.

Outdoor Fixtures

1. Connect positive supply wire **(A)** (typically black or the smooth unmarked side of the two-conductor cord) to positive fixture lead **(B)** with appropriately sized twist on connector - see **Drawings 2 or 3**.
2. Connect negative supply wire **(C)** (typically white or the ribbed, marked side of the two-conductor cord) to negative fixture lead **(D)**.
3. Cover open end of connectors with silicone sealant to form a watertight seal.
 - If installing a wall mount fixture, use caulk to seal gaps between the fixture mounting plate (backplate) and the wall. This will help prevent water from entering the outlet box. If the wall surface is lap siding, use caulk and a fixture mounting platform specially.
4. Please refer to the **grounding instructions** below to complete all electrical connections.

grounding instructions

Flush Mount Fixtures

For positive grounding in a 3-wire electrical system, fasten the fixture ground wire **(E)** (typically copper or green plastic coated) to the fixture mounting strap **(1)** with the ground screw **(2)** - see **Drawing 1**.

Note: On straps for screw supported fixtures, first install the two mounting screws in strap. Any remaining tapped hole may be used for the ground screw.

Chain Hung Fixtures

Loop fixture ground wire **(E)** (typically copper or green plastic coated) under the head of the ground screw **(2)** on fixture mounting strap **(1)** and connect to the loose end of the fixture ground wire directly to the ground wire of the building system with appropriately sized twist-on connectors - see **Drawing 2**.

Post-Mount Fixtures

Connect fixture ground wire **(E)** (typically copper or green plastic coated) to power supply ground with appropriately sized twist-on connector inside post. Cover open end of connector with silicone sealant to form a watertight seal - see **Drawing 3**.