


Family: Mayflower | Item No. 4167 OB


▼ start here




Drawing 1 - Strap Detail

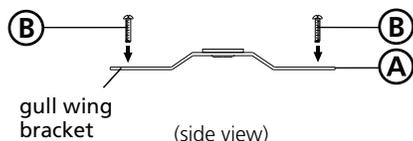

Drawing 2 - Fixture Mounting

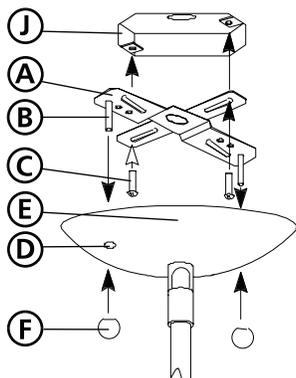

Drawing 3 - Glass Installation

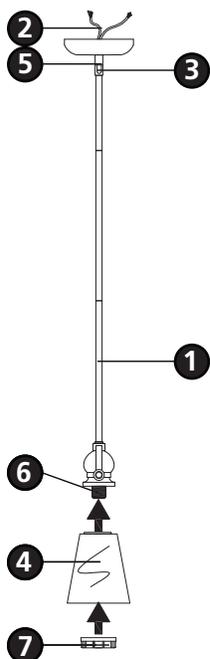

1

1. Find a clear area in which you can work.
2. Unpack fixture and glass from carton.
3. Carefully review instructions prior to assembly.

***** The construction of this fixture will be accomplished by first determining the length of stem required, mounting the mounting strap to the junction box, making all necessary electrical connections, hanging the fixture from the ceiling, and then installing the glass.**

2

1. Determine the overall length you will need the assembled fixture to be.
2. Determine what stem will be needed to achieve the overall length you require. (Additional stems are available and can be ordered. Ask your local Hinkley Lighting representative or visit www.hinkleylighting.com for information.)
3. Slip stems **(1)** over wire **(2)** - see **Drawing 3**.
4. Thread first stem **(1)** onto glass holder **(6)**. Then proceed to thread the rest of stems **(1)** together.
5. Thread large square loop **(3)** onto end of last stem attached.
6. Attach chain **(5)** to large square loop **(3)**.

3

1. Prepare gem strap **(A)** for mounting by threading two screws **(B)** provided into back of gull wing bracket of gem strap **(A)** - see **Drawing 1**.
 - Be sure the holes into which the screws are threaded match the spacing of holes **(D)** in the canopy **(E)** - see **Drawings 1 and 2**.
2. Mount gem strap **(A)** to junction box **(J)**, using the two 1" screws **(C)** provided.

SAFETY WARNING: READ WIRING AND GROUNDING INSTRUCTIONS (I.S. 18) AND ANY ADDITIONAL DIRECTIONS. TURN POWER SUPPLY OFF DURING INSTALLATION. IF NEW WIRING IS REQUIRED, CONSULT A QUALIFIED ELECTRICIAN OR LOCAL AUTHORITIES FOR CODE REQUIREMENTS.

4

Make electrical connections from supply wire to fixture lead wires. Refer to instruction sheet **(I.S. 18)** and follow all instructions to make all necessary wiring connections. Then refer back to this sheet to continue installation of this fixture.

5

1. Hang the fixture by slipping the holes **(D)** in the canopy **(E)**, over the screws **(B)** in the mounting strap - see **Drawing 2**.
2. Thread on ball knobs **(F)** to secure fixture to the ceiling.

6

1. To install glass, remove socket ring **(7)** from socket **(6)** - see **Drawing 3**.
2. Slip glass **(4)** over socket **(6)** and thread socket ring **(7)** back on to socket **(6)**.
3. Fixture can now be lamped accordingly.

Note: Maximum wattage for 4167 fixture is 100 watts per bulb.

2.7.08