



Family: Plymouth | Item No. 4244 OB



Drawing 1 - Fixture Assembly

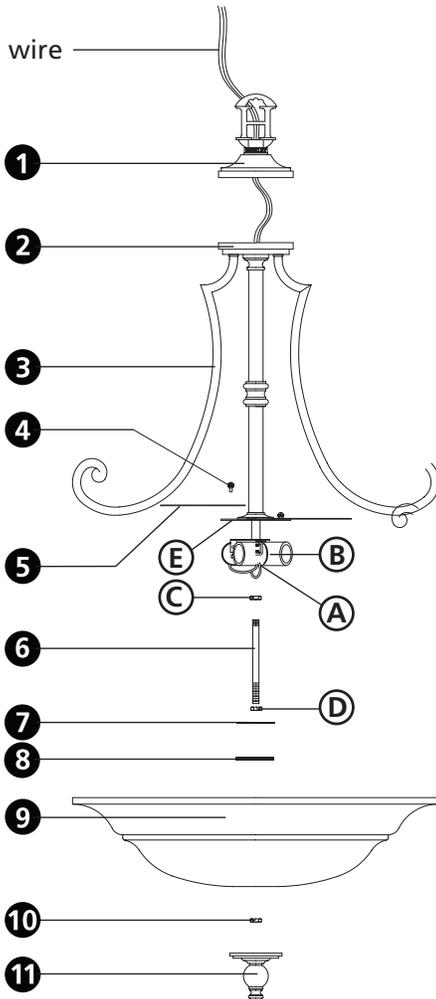

## ▼ start here

**1**

1. Find a clear area in which you can work.
2. Unpack fixture and glass from carton.
3. Carefully review instructions prior to assembly.

**\*\*\* The construction of this fixture will be accomplished by first assembling the main body of the fixture, hanging the fixture from the ceiling, and then installing the glass.**

**SAFETY WARNING: READ WIRING AND GROUNDING INSTRUCTIONS (I.S. 18) AND ANY ADDITIONAL DIRECTIONS. TURN POWER SUPPLY OFF DURING INSTALLATION. IF NEW WIRING IS REQUIRED, CONSULT A QUALIFIED ELECTRICIAN OR LOCAL AUTHORITIES FOR CODE REQUIREMENTS.**

**2**

1. Slip top cap (1) with loop attached, along wire and thread onto top of wiring compartment (2) - see **Drawing 1**.
2. Fold out arms (3) until they are equally spaced **120 degrees** apart.
3. Using the 4 ball knobs and stud screws (4) provided, attach the 2 white perforated bulb shields (5) to the shield bracket (E).
4. Thread stem (6) into coupler (A), located in the center of the socket cluster (B), approximately 1/4".
5. Using a 9/16" wrench, tighten hex nut (C) against coupler (A) to lock stem (6) in place.
6. Adjust hex nut (D) on stem (6) until it is approximately 2 3/4" from the bottom of the stem.
7. Please refer to the hanging instruction sheet (I.S. 19) provided to continue installation of this fixture. Refer back to this sheet for glass installation instructions below.

**3**

1. Slip steel flat washer (7) onto stem (6) - see **Drawing 1**.
2. Slip rubber washer (8) onto stem (6).
3. Slip glass (9) onto stem (6) and hold in position.
4. Thread hex nut (10) onto stem (6) and cautiously tighten up against glass (9). Over tightening of parts could cause glass damage.
5. Fixture can now be lamped accordingly.

Note: Maximum wattage for 4244 fixture is 75 watts per bulb.

2.7.08