



# assembly instructions

4576

Family: Mondrian | Item No. 4576 KZ



**Drawing 1 - Fixture Assembly**

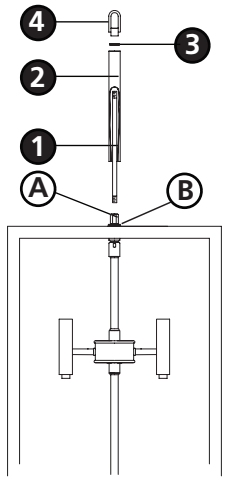

▼ start here

**1**

1. Find a clear area in which you can work.
2. Unpack fixture and glass from carton.
3. Carefully review instructions prior to assembly.

**\*\*\* The construction of this fixture will be accomplished by first assembling the fixture, installing the fixture glass, installing the mounting bracket to the junction box, making all necessary electrical connections and hanging the fixture from the ceiling.**

**Drawing 2 - Glass Installation**

**SAFETY WARNING: READ WIRING AND GROUNDING INSTRUCTIONS (I.S. 18) AND ANY ADDITIONAL DIRECTIONS. TURN POWER SUPPLY OFF DURING INSTALLATION. IF NEW WIRING IS REQUIRED, CONSULT A QUALIFIED ELECTRICIAN OR LOCAL AUTHORITIES FOR CODE REQUIREMENTS.**

**2**

1. To assemble fixture, thread center tube (1) into coupler (A) approximately 3/8" - see **Drawing 1**.
2. Slip square tube (2) over center tube (1) and fit over square base (B).
3. Thread knurl nut (3) onto center tube (1) and tighten.
4. Thread loop (4) onto end of center tube (1) and tighten.

**3**

1. To install glass panels, unwrap and organize glass panels - see **Drawing 2**.
  - Note: Center column is on swivel. After glass is installed caution must be used when moving the fixture so stem does not swivel and break glass.
2. Refer to glass installation instruction sheet provided. Then refer to the hanging instruction sheet (I.S. 19) provided to hang this fixture. Then fixture can be lamped accordingly.

Note: Maximum wattage for 4576 fixture is 60 watts per bulb.

3.23.10

