




Family: Sussex | Item No. 4791 EZ/BN




**Drawing 1 - Fixture Assembly**

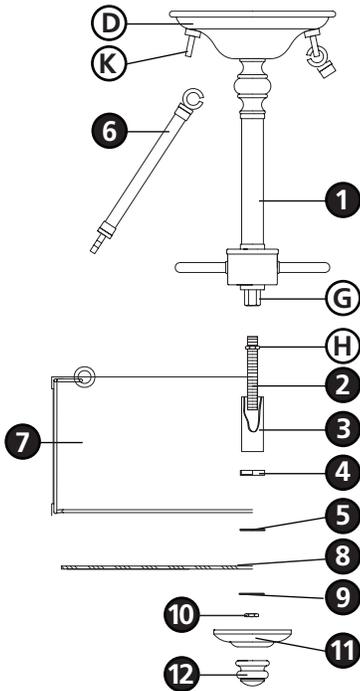

**Drawing 2 - Strap Detail**

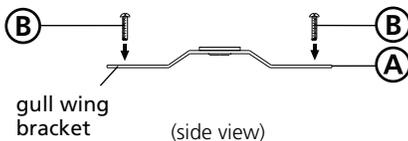

**Drawing 3 - Fixture Mounting**

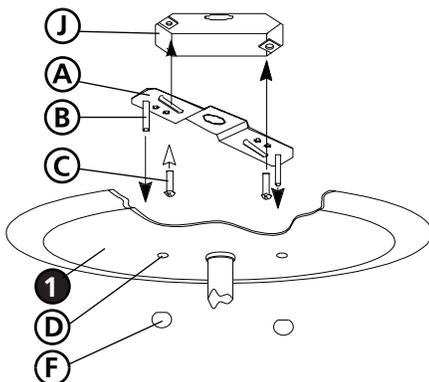

## ▼ start here

**1**

1. Find a clear area in which you can work.
2. Unpack fixture and glass from carton.
3. Carefully review instructions prior to assembly.

**\*\*\* The construction of this fixture will be accomplished by first assembling the main body, installing the mounting hardware, making all necessary electrical connections, attaching the shade and then installing the fixture glass.**

**2**

1. To assemble main body, take center column assembly (1) and thread tubing (2) into coupler (G) approximately 3/8" - see **Drawing 1**.
2. Thread hex nut (H) up against coupler (G) and tighten to secure tubing (2).
3. Slip sleeve (3) over tubing (2) and hold in position.
4. Slip cap (4) onto tubing (2) and up against bottom of sleeve (3) and hold in position.
5. Slip rubber washer (5) and push up against cap (4). Note: rubber washer (5) should hold all parts in position.

**3**

1. Prepare gem strap (A) for mounting by threading two screws (B) provided into back of gull wing bracket of gem strap (A) - see **Drawing 2**.
  - Be sure the holes into which the screws are threaded match the spacing of holes (D) in the ceiling pan (1) - see **Drawings 2 and 3**.
2. Mount gem strap (A) to junction box (J), using the two 1" screws (C) provided.

**SAFETY WARNING: READ WIRING AND GROUNDING INSTRUCTIONS (I.S. 18) AND ANY ADDITIONAL DIRECTIONS. TURN POWER SUPPLY OFF DURING INSTALLATION. IF NEW WIRING IS REQUIRED, CONSULT A QUALIFIED ELECTRICIAN OR LOCAL AUTHORITIES FOR CODE REQUIREMENTS.**

**4**

- Make electrical connections from supply wire to fixture lead wires. Refer to instruction sheet (I.S. 18) and follow all instructions to make all necessary wiring connections. Then refer back to this sheet to continue installation of this fixture.

**5**

1. Hang the fixture by slipping the holes (D) in the ceiling pan (1) over the screws (B) in the mounting strap (A) - see **Drawing 3**.
2. Thread on ball knobs (F) to secure fixture to the ceiling.

**6**

1. Prior to installing glass, fixture can now be lamped accordingly.
2. To install glass, hook one end of upright (6) to loop (K) on ceiling canopy (D) - see **Drawing 1**.
3. Hook circular loops on top of shade (7) onto end of upright (6).
4. Slip circular glass (8) onto tubing (2) and hold in position.
5. Slip washer (9) onto tubing (2) and hold in position.
6. Thread hex nut (10) onto tubing (2) and tighten to secure glass (8).
7. Slip bottom cap (11) and thread bottom knob (12) onto tubing (2) and tighten to secure.

Note: Maximum wattage for 4791 fixture is 75 watts per bulb.

6.7.09