


**Drawing 1 - Fixture Assembly**

▼ start here

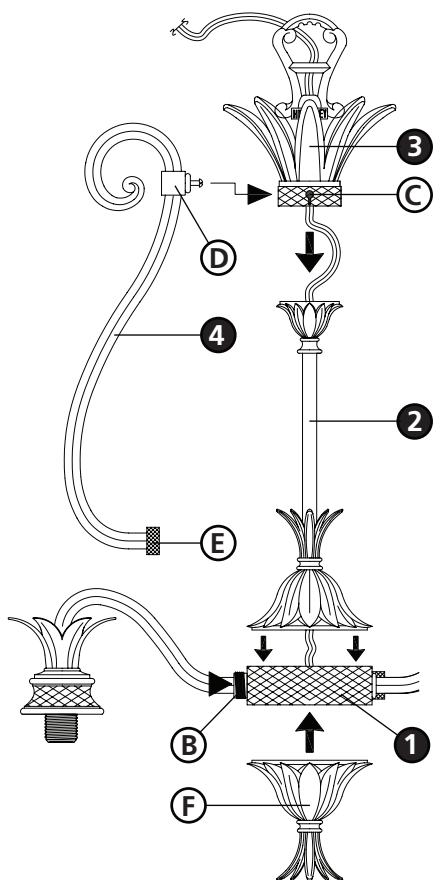

**1**

1. Find a clear area in which you can work.
2. Unpack fixture and glass from carton.
3. Carefully review instructions prior to assembly.

**\*\*\* The construction of this fixture will be accomplished by first assembling the main body of the fixture, making all necessary electrical connections, hanging the fixture from the ceiling, and then installing the fixture glass.**


**SAFETY WARNING: READ WIRING AND GROUNDING INSTRUCTIONS (I.S. 18) AND ANY ADDITIONAL DIRECTIONS. TURN POWER SUPPLY OFF DURING INSTALLATION. IF NEW WIRING IS REQUIRED, CONSULT A QUALIFIED ELECTRICIAN OR LOCAL AUTHORITIES FOR CODE REQUIREMENTS.**

**2**

1. Slide center column assembly (2) along wire and thread onto top of main body assembly (1) - see **Drawing 1**.
2. Thread top crown assembly (3) into top of center column assembly (2).
  - Be sure that keyhole slots (C) line up with thread knobs (B) on main body assembly (1).
3. Attach uprights (4) by slipping screw (D), into keyhole slot (C).
4. Thread knurl knob (E) onto threaded knob (B) located on main body assembly (1).
5. Thread bottom finial (F) onto bottom of main body assembly (1).
6. Please refer to the hanging instruction sheet (I.S. 19) provided to hang fixture. Then refer back to this sheet to continue installation of this fixture.

**Drawing 2 - Glass Installation**

**3**

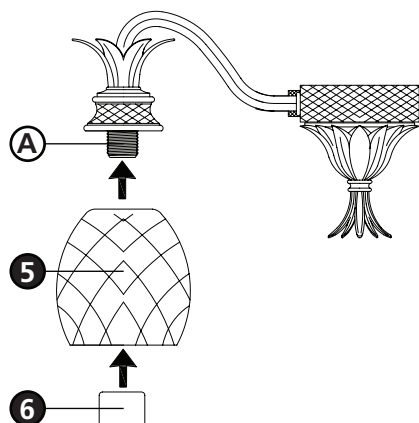

1. Slip glass (5) over socket (A) - see **Drawing 2**.
2. Thread socket ring (6) onto socket (A) to secure glass (5).
3. Fixture can now be lamped accordingly.

Note: Maximum wattage for 4885 fixture is 60 watts per bulb.

2.7.08