



Drawing 1 - Fixture Assembly

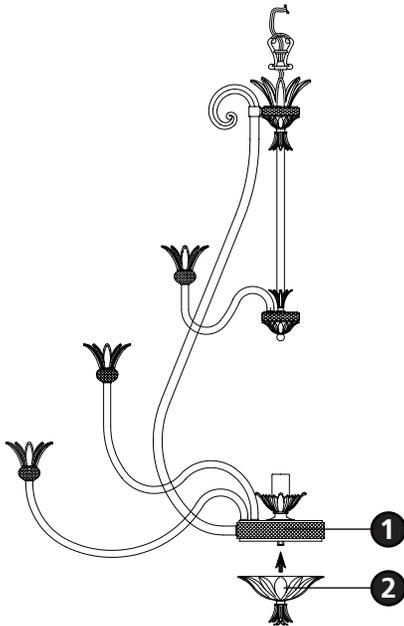

Drawing 2 - Glass Installation

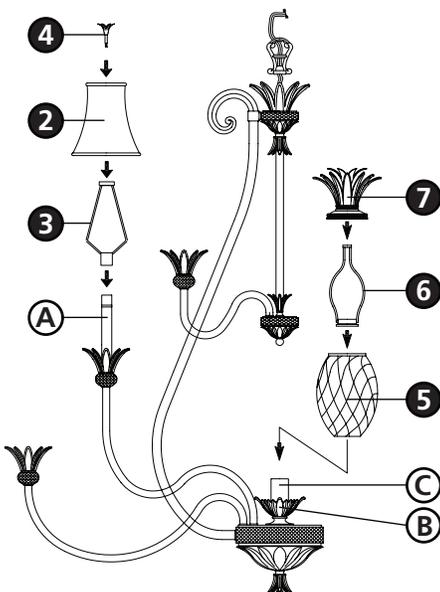

▼ start here

1

1. Find a clear area in which you can work.
2. Unpack fixture and glass from carton.
3. Carefully review instructions prior to assembly.

***** The construction of this fixture will be accomplished by first assembling the main body of the fixture, making all necessary electrical connections, hanging the fixture from the ceiling, and then installing the fixture glass.**

SAFETY WARNING: READ WIRING AND GROUNDING INSTRUCTIONS (I.S. 18) AND ANY ADDITIONAL DIRECTIONS. TURN POWER SUPPLY OFF DURING INSTALLATION. IF NEW WIRING IS REQUIRED, CONSULT A QUALIFIED ELECTRICIAN OR LOCAL AUTHORITIES FOR CODE REQUIREMENTS.

2

1. Spread top tier of arms until they are 120 degrees apart. Spread second tier of arms 60 degrees apart. Spread bottom tier of arms 30 degrees apart.
2. Thread bottom finial (2) onto bottom of main body assembly (1) - see **Drawing 1**.
3. Please refer to the hanging instruction sheet (I.S. 19-50) provided to continue installation of this fixture. Then refer back to this sheet to continue install glass.

3

1. To install glass, slip shade harp (3) onto the candle sleeve (A) - see **Drawing 2**.
2. Attach shade (2) by placing over shade harp (3) and threading shade finial (4) into threaded hole on top of shade harp (3).
3. Repeat steps 1 and 2 for remaining arms.
4. Slip center glass (5) into the center glass fitter (B).
5. Take center harp (6) and thread into socket (C) to hold glass in place.
6. Thread crown (7) onto top of harp (6).

Note: Maximum wattage for 4889 fixture's center light is 25 watts per bulb.
Maximum wattage for 4889 fixture's lower lights are 25 watts per bulb.

5.30.08