


INSTALLATION INSTRUCTIONS

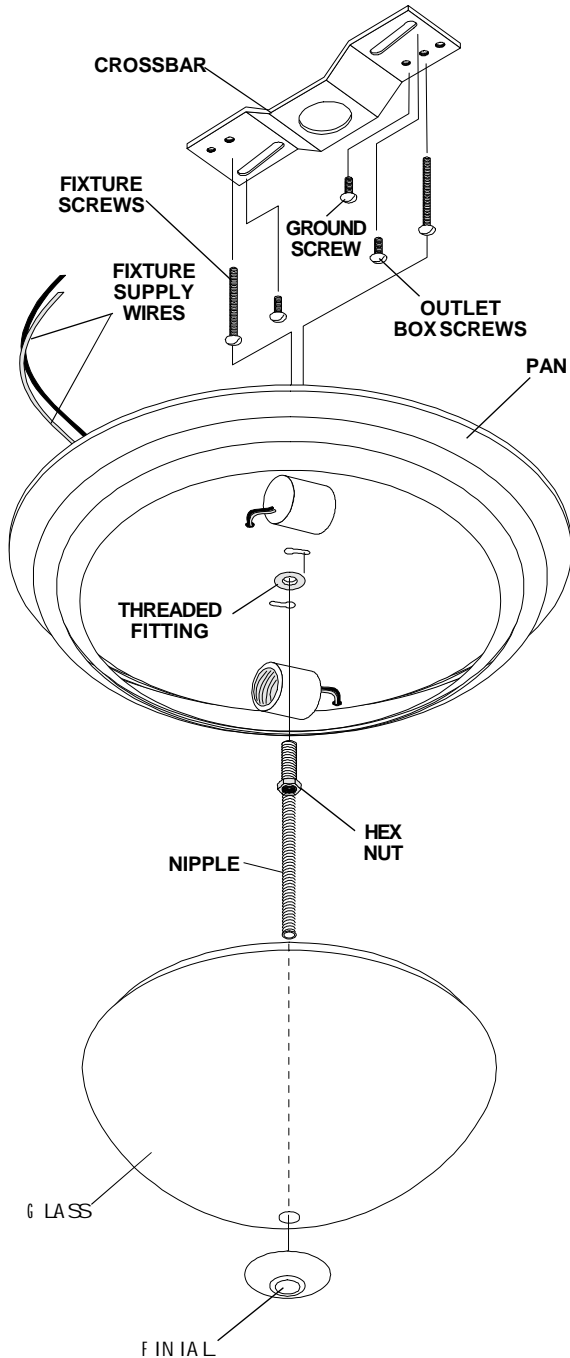

1. Before beginning the installation, carefully unpack and identify all parts, referring to the illustration(s).
2. Before installing, preset the NIPPLE length:
 - a) Place the PAN on a flat surface.
 - b) Thread the HEX NUT onto the NIPPLE, and start the NIPPLE into the THREADED FITTING.
 - c) Place the GLASS on the PAN, and thread the FINIAL onto the NIPPLE, *making sure the threads engage and the FINIAL is in a secure position and retains the GLASS.*
 - d) *Remove the FINIAL and the GLASS.*
 - e) Set the HEX NUT to lock the NIPPLE in position.
3. Turn the electrical power to the installation point **OFF**.
4. Using (2) OUTLET BOX SCREWS, securely fasten the CROSSBAR to the outlet box. Start the (2) FIXTURE SCREWS into the CROSSBAR, as shown.
5. Lift the FIXTURE PAN into position and make the wiring connections: Connect the HOUSE GROUND WIRE to the CROSSBAR with GREEN GROUND SCREW. Using wire connectors, connect the HOUSE WHITE WIRE(S) to the FIXTURE WHITE (or RIBBED) WIRE(S); connect the HOUSE BLACK (or RED) WIRE to the FIXTURE BLACK (or SMOOTH) WIRE(S). Make sure that there are no exposed wires or strands, and that the connections are secure.
6. Fit the heads of the FIXTURE SCREWS through the KEYHOLE SLOTS in the FIXTURE PAN, rotate the PAN until the FIXTURE SCREW heads are seated at the small ends of the KEYHOLE SLOTS, and secure both FIXTURE SCREWS.
7. Install the bulbs. (See fixture markings and/or labels for bulb types and maximum wattages.)
9. Carefully fit the GLASS over the NIPPLE, seating the GLASS lip into the FIXTURE PAN. Pass the mounting hole in the CAP over the NIPPLE. Secure by threading the FINIAL onto the end of the NIPPLE. Hand tighten until snug.
10. Restore electrical power to the circuit. Retain this sheet for parts replacement and/or service.

IF IN DOUBT ABOUT ELECTRICAL INSTALLATION, CONSULT A LICENSED ELECTRICIAN.