


ASSEMBLY / INSTALLATION
INSTRUCTIONS:

FIGURE 1



1. Before beginning installation, carefully unpack and identify all parts, referring to illustration (FIGURE 1).
2. Turn power to installation point OFF.
3. Locate the (2) MOUNTING SCREWS and thread them into the back of the CROSSBAR, making sure that they match the holes in the FIXTURE CANOPY. Using (2) OUTLET BOX SCREWS (not included), fasten the CROSSBAR to the OUTLET BOX.
4. **Making the wire connections:** Use wire connector (not supplied) Connect the HOUSE WHITE WIRE to the FIXTURE WHITE (or RIBBED) LEAD; connect the HOUSE BLACK (or RED) WIRE to the FIXTURE (or SMOOTH) LEAD. Using the GROUND SCREW, fasten the HOUSE GROUND WIRE and the FIXTURE GROUND LEAD to the CROSSBAR.
5. Carefully tuck all of the wiring up into the outlet box, and fit the FIXTURE CANOPY over the MOUNTING SCREWS. Secure the FIXTURE CANOPY to the ceiling with the (2) MOUNTING BALLS, making sure that the balls are fully threaded onto the MOUNTING SCREWS before tightening.
6. Locate SHADE HOLDER over SOCKET onto COVER. Proceed to locate SHADE over SOCKET seating SHADE HOLDER. Secure them by threading SOCKET COLLAR onto SOCKET. Hand tighten until snug.
7. Install bulb referring to fixture markings and/or labels for maximum wattage.
8. Restore power to installation point ON. Retain this sheet for future reference.

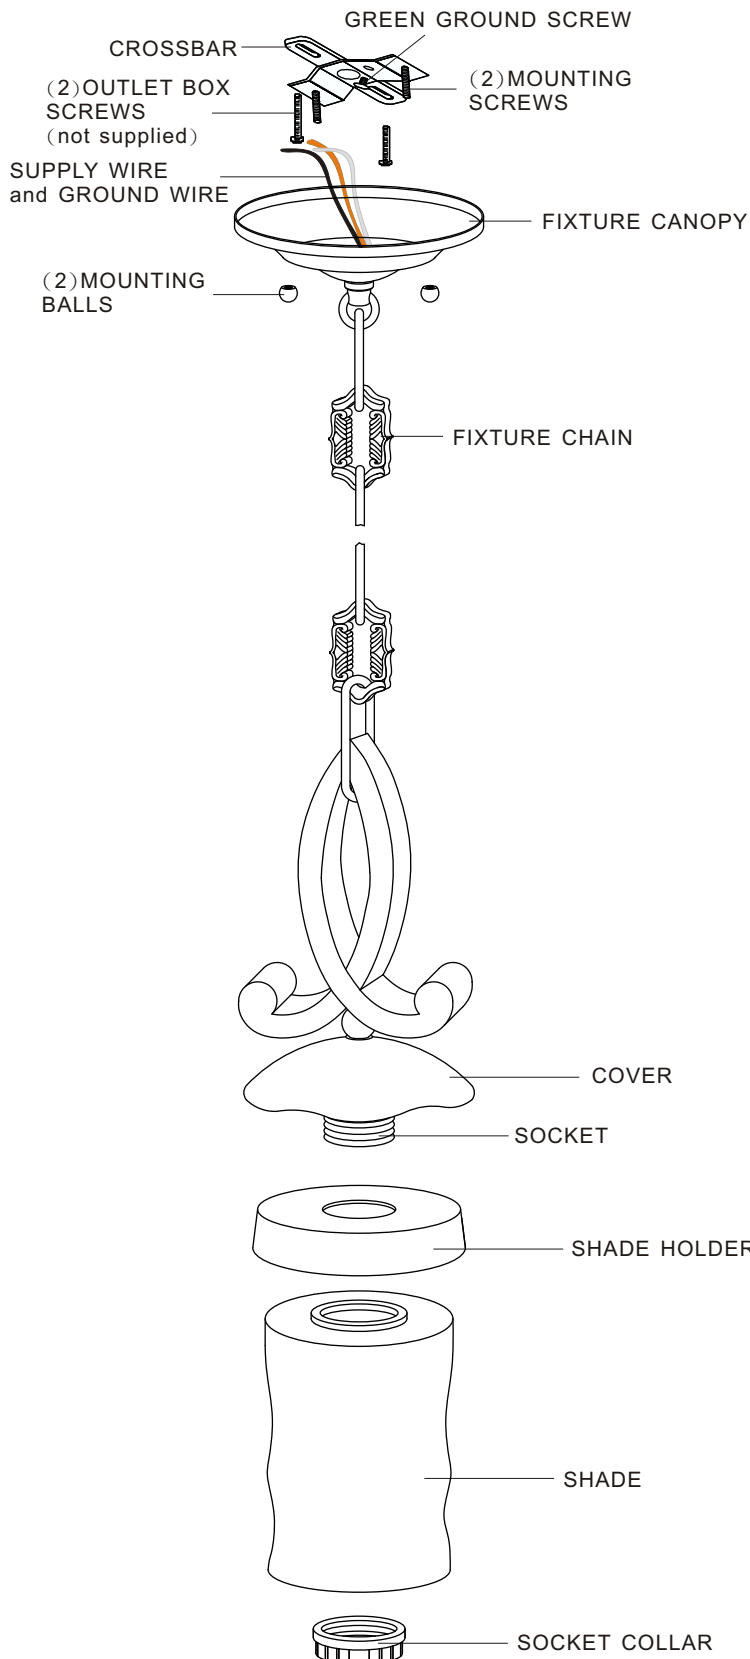

**IF IN DOUBT ABOUT ELECTRICAL INSTALLATION,
 CONSULT A LICENSED ELECTRICIAN!**