
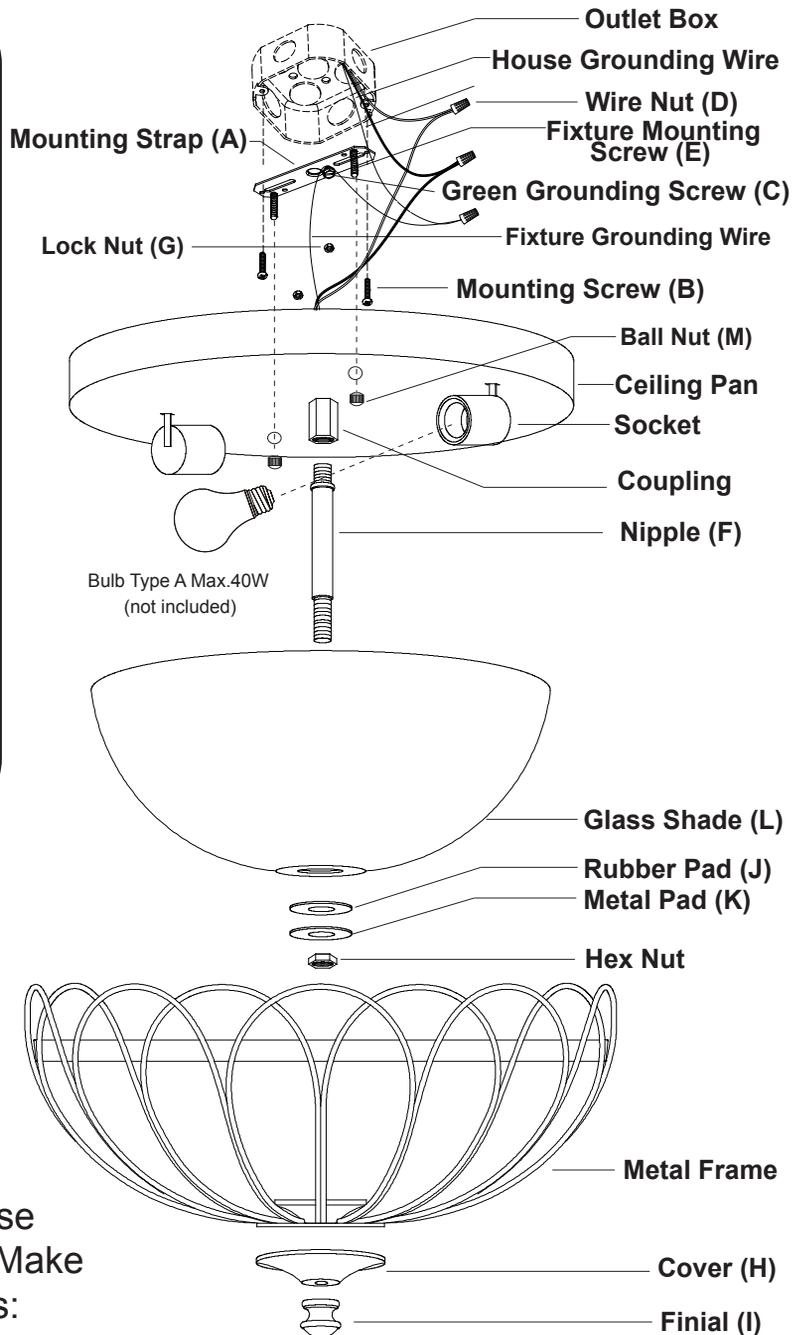


ASSEMBLY AND INSTALLATION INSTRUCTIONS

C0037


WARNING: BE SURE TO SHUT OFF POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE INSTALLING OR SERVICING THIS FIXTURE.

**NOTE: 1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. READ AND SAVE THESE INSTRUCTIONS.**

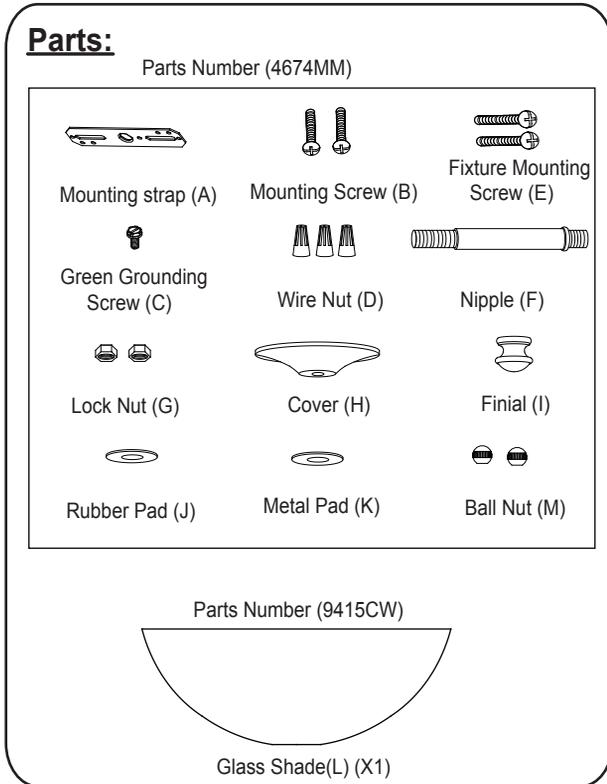

1. Thread two fixture mounting screws through the mounting strap, then secure them with two lock nuts. Adjust the length of the fixture mounting screws if necessary.
2. Attach the mounting strap to the outlet box by using two mounting screws.
3. Pull out the outlet wires and the house grounding wire from the outlet box. Make wire connections using the wire nuts:
 - The black wire from the fixture to the black wire from the power source.
 - The white wire from the fixture to the white wire from the power source.
 - Attach the fixture grounding wire to the mounting plate with the green grounding screw. Then connect it to the house grounding wire with the wire nut.
4. Attach the ceiling pan to the mounting strap by inserting the fixture mounting screws, then secure it with two ball nuts.

5. Screw the nipple into the coupling.
6. Install bulbs (not included). See relamping label at socket area or packaging for maximum allowed wattage.
7. Place the glass shade over the ceiling pan, making sure the nipple feeds through its center hole, then secure the glass shade with a rubber pad, metal pad and hex nut.
8. Slide the metal frame and the cover onto the nipple, secure them with the finial.
9. Turn on the power at the main fuse or circuit breaker box.

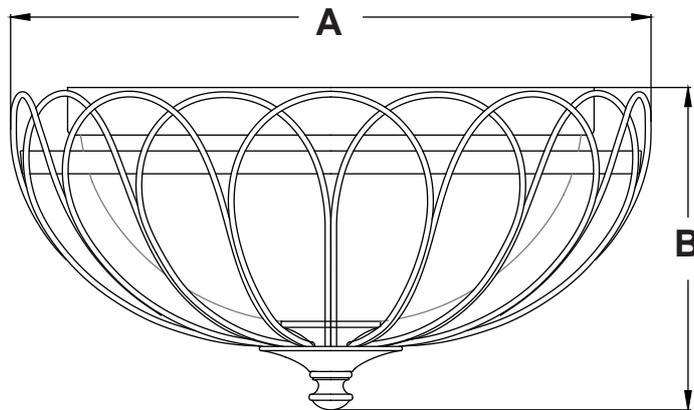

A: 13"
B: 6-1/2"