


ASSEMBLY AND INSTALLATION INSTRUCTIONS

CP-WSU170

WARNING: BE SURE TO SHUT OFF POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE INSTALLING OR SERVICING THIS FIXTURE.

**NOTE: 1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. READ AND SAVE THESE INSTRUCTIONS.**

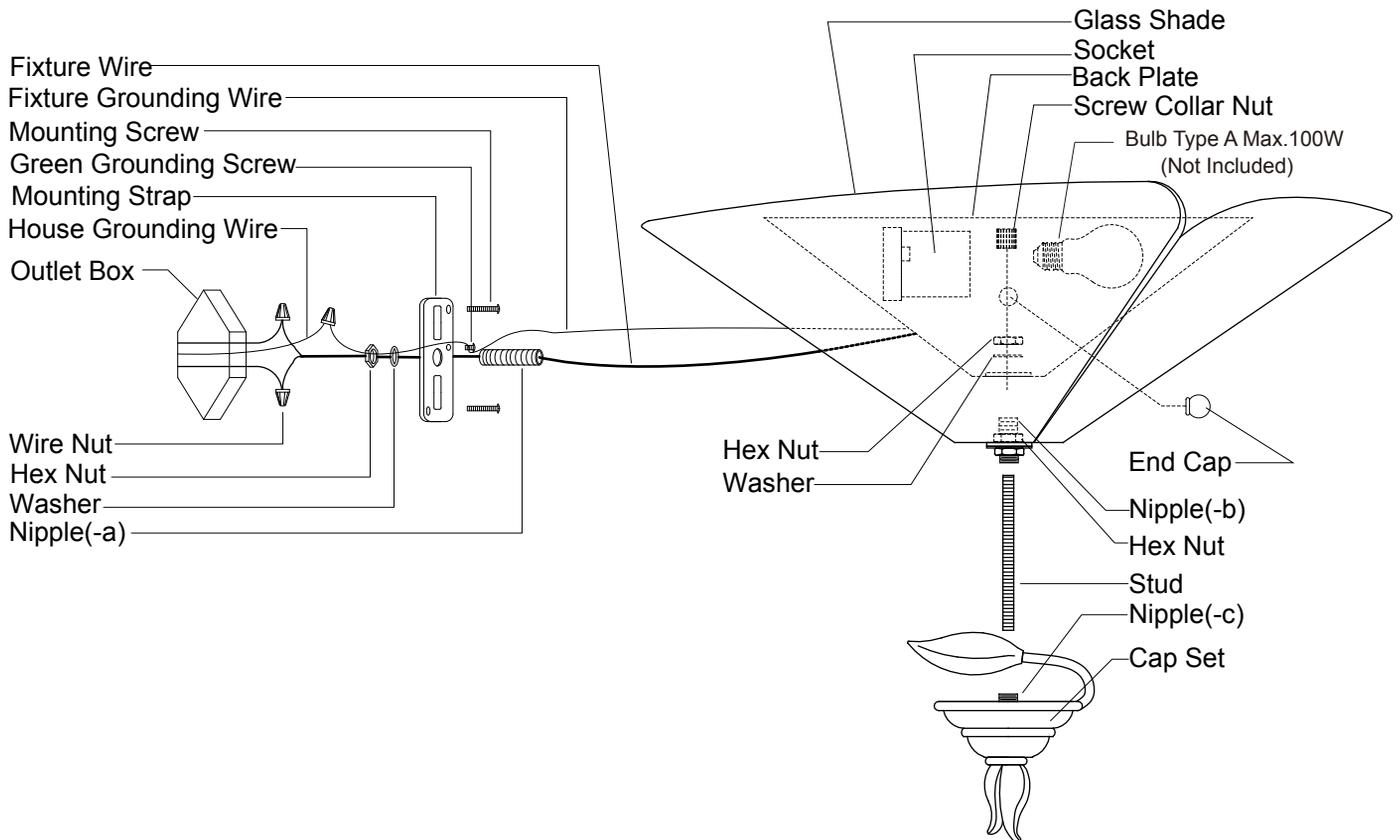

1. Attach nipple(-a) to the mounting strap, then secure it with a washer and hex nut.
2. Attach the mounting strap to the outlet box by using the two mounting screws.
3. Attach the back plate to the hex nut of the glass shade by inserting nipple(-b), and then secure it with a hex nut and washer.
4. Secure the stud into nipple(-c) of the cap set, then attach them to the glass shade with the other end of the stud through nipple(-b), and then secure them with screw collar nut.
5. Pull out the outlet wires and house grounding wire from the outlet box. Make wire connections with wire nuts:
 - The black wire from the light to the black wire from the power source.
 - The white wire from the light to the white wire from the power source.
 - Attach the fixture grounding wire to the mounting strap with the green grounding screw. Then connect it to the house grounding wire with a wire nut.
 Carefully tuck the wires back into the outlet box.
6. Attach the back plate to the mounting strap by inserting nipple(-a), then secure it with a end cap.
7. Install a bulb (not included). See relamping label at socket area or packaging for maximum allowed wattage.
8. Turn on the power at the main fuse or circuit breaker box.