

ASSEMBLY AND INSTALLATION INSTRUCTIONS

VL55401 / VL55501 / VL55601 / VL55701

WARNING: BE SURE TO SHUT OFF POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE INSTALLING OR SERVICING THIS FIXTURE.

**NOTE: 1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. READ AND SAVE THESE INSTRUCTIONS.**

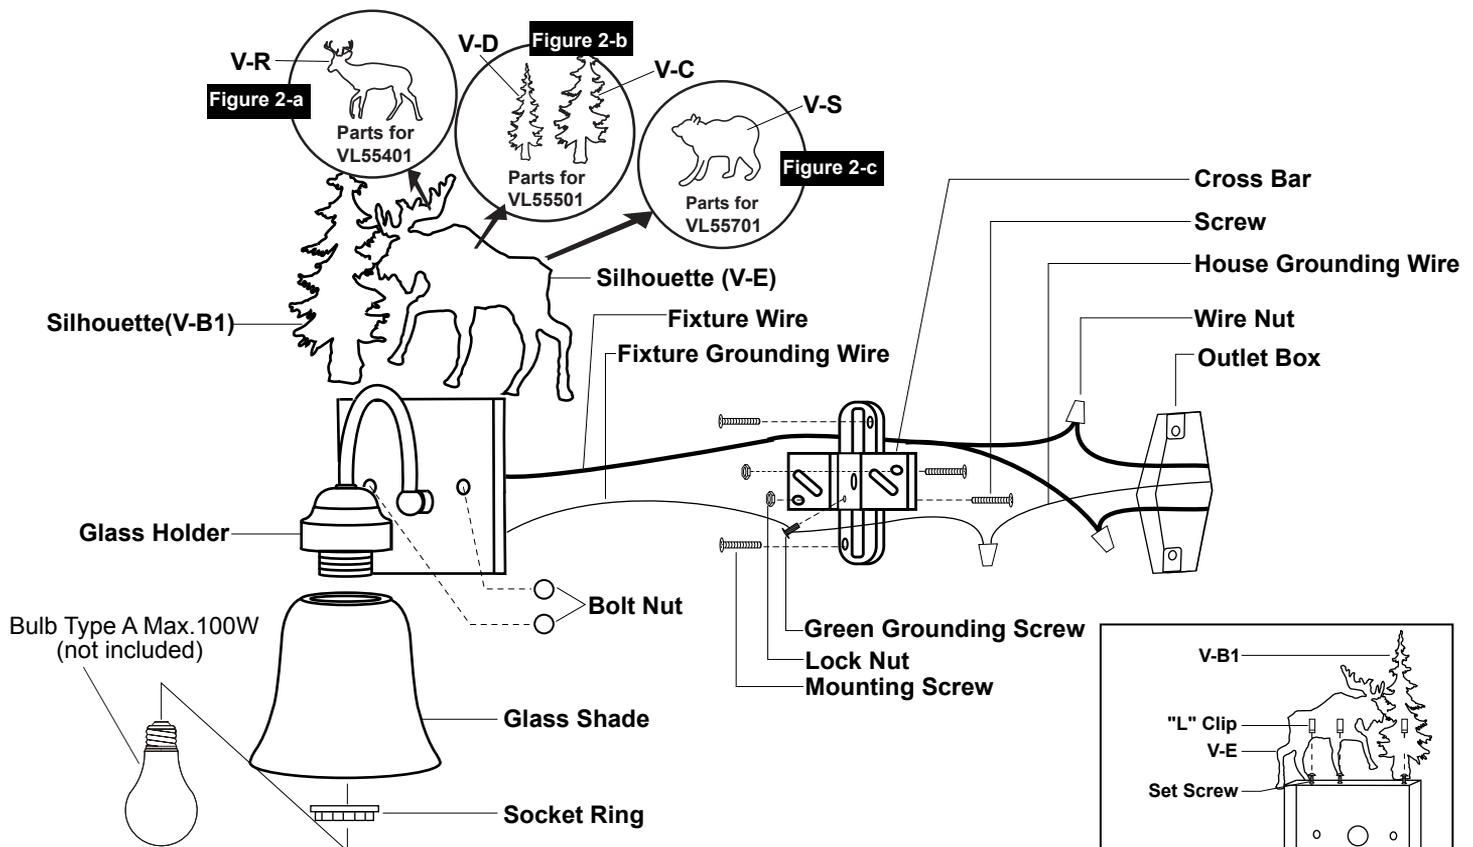


Figure 1

1. Thread two screws to the cross bar, and then secure with two lock nuts. Adjust the length of the screws if necessary.
2. Attach the cross bar to the outlet box by using two mounting screws.
3. Install the silhouettes onto the frame.
 - a. Take a silhouette and place it onto the back plate with the hole in the back plate aligning the slot in the clip of the silhouette, secure it with a set screw. (See Figure 1)
 - b. Repeat with the other silhouettes.
 - c. You can install the silhouettes which marked V-R (for VL55401) or marked V-D & V-C (for VL55501) or marked V-S (for VL55701) to the location of silhouettes which marked V-E (for VL55601) to replace them. (See Figure 2-a/b/c)
4. Pull out the outlet wires and the house grounding wire from the outlet box. Make wire connections using the wire nuts:
 - Connect the black wire from the fixture to the black wire from the power source.
 - Connect the white wire from the fixture to the white wire from the power source.
 - Attach the fixture grounding wire to the mounting plate with the green grounding screw. Then connect it to the house grounding wire with a wire nut.
 Carefully put the wires back into the outlet box.
5. Attach the back plate to the cross bar by inserting the screws, and then secure with two bolt nuts.
6. Attach the glass shade to the glass holder, secure it with the socket ring.
7. Install a bulb (not included). See relamping label at socket area or packaging for maximum allowed wattage.
8. Turn on the power at the main fuse or circuit breaker box.