


Drawing 1 - Fixture Assembly

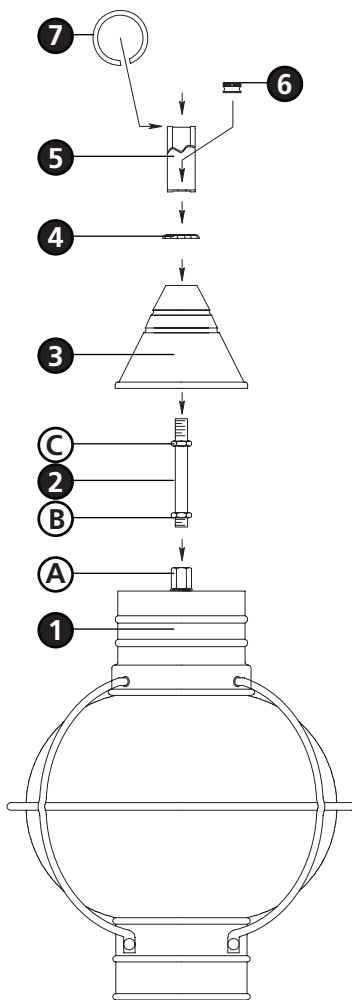

▼ start here

1

1. Find a clear area in which you can work.
2. Unpack fixture and glass from carton.
3. Carefully review instructions prior to assembly.

***** The construction of this fixture will be accomplished by first assembling the main body of the fixture, making all necessary electrical connections, and then hanging the fixture from the ceiling.**

SAFETY WARNING: READ WIRING AND GROUNDING INSTRUCTIONS (I.S. 18) AND ANY ADDITIONAL DIRECTIONS. TURN POWER SUPPLY OFF DURING INSTALLATION. IF NEW WIRING IS REQUIRED, CONSULT A QUALIFIED ELECTRICIAN OR LOCAL AUTHORITIES FOR CODE REQUIREMENTS.

2

1. The top assembly of the fixture comes assembled. In order to assemble the fixture the following must be taken apart: remove center tubing (2) from cone (3) by removing cap (5) - see **Drawing 1**.
2. Slip center tubing (2) onto supply wire and thread into coupler (A) on top of the main body (1), approximately 3/8".
3. Tighten hex nut (B) against coupler (A) to lock center tubing in place.
4. Slip cone (3) over supply wire and onto tubing (2).
5. Adjust hex nut (C) so it touches the inside top of the cone (3) when base of cone touches the top of the fixture body.
6. Slip decorative check ring (4) over supply wire and onto center tubing (2).
7. Slip ring (5) over supply wire and onto center tubing (2).
8. Thread top cap (6) over supply wire and onto center tubing (2) and tighten.
9. Spread hanging ring (7) and slip over ring (6) and close gap in ring (7) to prevent it from slipping off the fixture and attach chain to ring (7).
10. Please refer to hanging Instruction Sheet (I.S. 19) provided to hang fixture.

Note: Maximum wattage for 2202 fixture is 100 watts per bulb.

3.27.08