



Family: Casa | Item No. 3502 OL



Drawing 1 - Fixture Assembly

▼ start here

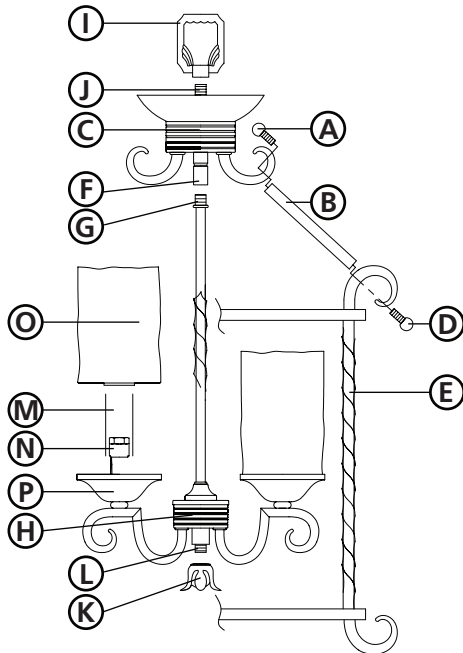

1

1. Find a clear area in which you can work.
2. Unpack fixture and glass from carton.
3. Carefully review instructions prior to assembly.

***** The construction of this fixture will be accomplished by first assembling the main body of the fixture, making all necessary electrical connections, hanging the fixture from the ceiling, and then installing the glass.**

SAFETY WARNING: READ WIRING AND GROUNDING INSTRUCTIONS (I.S. 18) AND ANY ADDITIONAL DIRECTIONS. TURN POWER SUPPLY OFF DURING INSTALLATION. IF NEW WIRING IS REQUIRED, CONSULT A QUALIFIED ELECTRICIAN OR LOCAL AUTHORITIES FOR CODE REQUIREMENTS.

2

1. To assemble fixture, connect fixture body (**H**) to top assembly (**C**) by screwing nipple (**G**) into swivel (**F**).
2. Using ball screw (**A**) connect square tube (**B**) to top assembly (**C**).
3. Using ball screw (**D**) connect square tube (**B**) to cage (**E**).
4. Repeat steps 2-3 for remaining tubes (**B**).
5. Holding the wires tight, screw loop (**I**) onto nipple (**J**).
6. Screw finial (**K**) onto nipple (**L**).
7. Please refer to the hanging instruction sheet (**I.S. 19**) provided to hang fixture. Then refer back to this sheet to continue installation of this fixture.

3

1. To install glass, slip tube (**M**) over socket (**N**).
2. Slip glass shade (**O**) over tube (**M**) into glass cup (**P**).
3. Repeat steps 1-2 for remaining glass.
4. Fixture can now be lamped accordingly.

Note: Maximum wattage for 3502 fixture is 60 watts per bulb.

2.7.08