



Bulbs: 60W MED.

# KINGSLEY


## FR42728SLF

### ASSEMBLY INSTRUCTIONS

Assembly of this fixture will be accomplished by first assembling the main body, installing the mounting hardware to the junction box, hanging the fixture and then installing the glass and shade.

**SAFETY WARNING:** Read wiring and grounding instructions [FRIS 18] and any additional directions. Turn power supply off during installation. If new wiring is required, consult a qualified electrician or local authorities for code requirements.

[DRAWING 1]

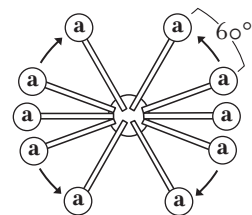

[DRAWING 2]


### STEP 1

- 1 Rotate arms (a) of main body (1) until they are equally spaced 60 degrees apart - See Drawing 1.
- 2 Rotate the 3 taller arms (b) until they are 120 degrees apart and equally spaced between the lower arms (a).
- 3 Slip neck (2) along wire and over coupler (c) - See Drawing 2.
- 4 Thread decorative break (3) into coupler (c).
- 5 Slip loop (4) along wire and thread onto top of decorative break (3).
- 6 Thread bottom finial (5) onto bottom of main body (1).

**STEP 2** Refer to Hanging Instruction Sheet [FRIS19] to hang fixture. Then refer back to this sheet to continue installation of this fixture.

### STEP 3

- 1 Slip glass bobesche (6) over socket (7) - See Drawing 2.
- 2 Slip cover sleeve (8) over socket (7) and into glass bobesche (6).
- 3 Slip center hole of glass lens (9) over socket (7).
- 4 Thread socket ring (10) onto socket to secure parts (6,8 and 9). Hand-tighten only, over tightening could damage the glass lens (9).
- 5 Fixture can now be lamped accordingly.
- 6 Clip shade (11) onto lamp.
- 7 Thread shade finial (12) onto top of shade (11).

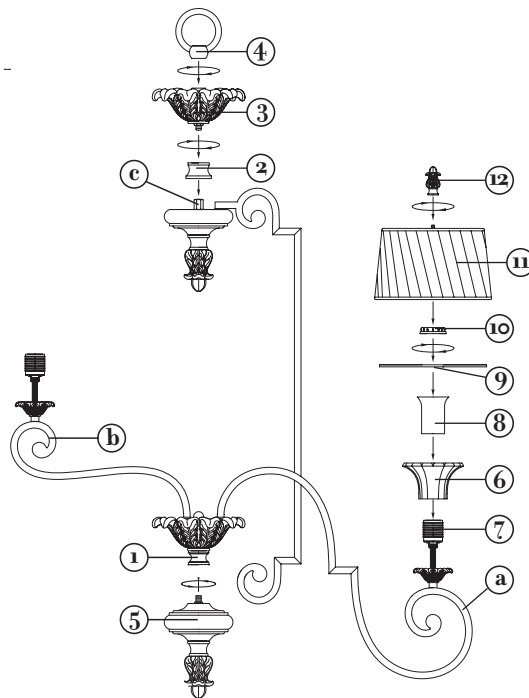

FREDRICK RAMOND  
ESTABLISHED 1965

800.421.3517 WWW.FREDRICKRAMOND.COM

6.22.09