

XANADU



FR43359

Bulbs: 60W CAND.

Replacement Parts: CRYSTALS: R43358CRY-A, R43358CRY-B

ASSEMBLY INSTRUCTIONS

Assembly of this fixture will be accomplished by first assembling the main fixture body, installing mounting hardware to junction box, mounting main body to ceiling and then installing the crystal body assembly.

SAFETY WARNING: Read wiring and grounding instructions [FRIS 18] and any additional directions. Turn power supply off during installation. If new wiring is required, consult a qualified electrician or local authorities for code requirements.

STEP 1


- 1 Prepare mounting strap (a) by threading the two 1 1/4" long mounting screws (b) into the back of the mounting strap (a), making sure the holes into which the screws are threaded match the spacing of holes (d) in the backplate (e) - See Drawing 1.
- 2 Attach mounting strap (a) to junction box (j) using two screws (c).
- 3 Make electrical connections from supply wire to fixture lead wires. Refer to instruction sheet [FRIS18] and follow all instructions to make all necessary wiring connections. Then refer back to this sheet to continue installation of this fixture.
- 4 To mount fixture, slip the two mounting screws (b) through the two mounting holes (d) in the backplate (e).
- 5 While holding fixture in place, thread the two ball knobs (f) on to the end of the mounting screws (b), and tighten.

STEP 2



This Xanadu flush mount uses 2 sizes of half pear crystal pendants.

- 1 Working from the top of the fixture down, attach smallest crystal pendants (1) to eyelets (a) - See Drawing 2.
- 2 Attach medium size crystal pendants (2) to eyelets (b).
- 3 Repeat steps 1-3 for remaining scrolls.

[DRAWING 1]

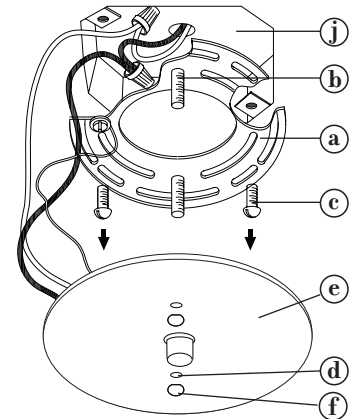

[DRAWING 2]

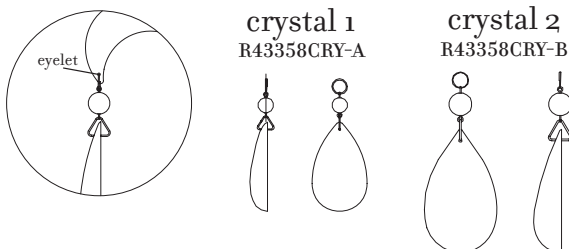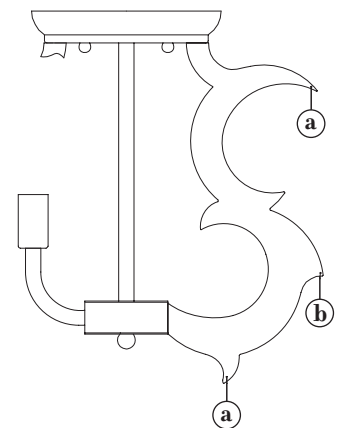

FREDRICK RAMOND
ESTABLISHED 1965

800.421.3517 WWW.FREDRICKRAMOND.COM

8.5.08