

INSTALLATION INSTRUCTIONS

For Model # N2202, N2203, N2204, N2093 and N2094 (New 06/07/2012)

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

MOUNTING THE FIXTURE (Fig. 1 & Fig. 2)

1. Shut off power at the circuit breaker and remove old fixture from ceiling, including the crossbar.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.
3. Secure Circular Strap (J) (Fig. 1) or Crossbar (J) (Fig. 2) using Screws (H) to the Outlet Box. The side of the Circular Strap or Crossbar marked "GND" must face out.
4. Screw Stud (I) into the screw hole of Circular Strap or Crossbar.

CONNECTING THE WIRES (Fig. 3)

5. At this point, connect the electrical wire as shown in figure 2, making sure that all wire connectors are secured. If your outlet has a ground wire (green or bare copper), connect the fixtures Ground Wire to it. Otherwise, connect the fixture Ground Wire directly to the circular strap or crossbar using the Green Screw provided. After wires are connected, tuck them carefully inside the Junction Box.

FINISHING THE INSTALLTION (Fig. 1 & 2)

6. Place Fixture Light assembly into Studs (I) and secure it tightly using Cap Nut (G). For additional stability on large fixtures, use the two Screws (F) and Plastic Anchors (E) provided for end mounting.
7. Install Glass Shade (A) and Metal Washer (B) to fixture cups secure in place with Screw Shells (C).
8. Install the light bulb in accordance with the fixture's specifications. **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!) (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**

Your installation is now complete. Return power to the outlet box and test the fixture.

Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

Fig. 1

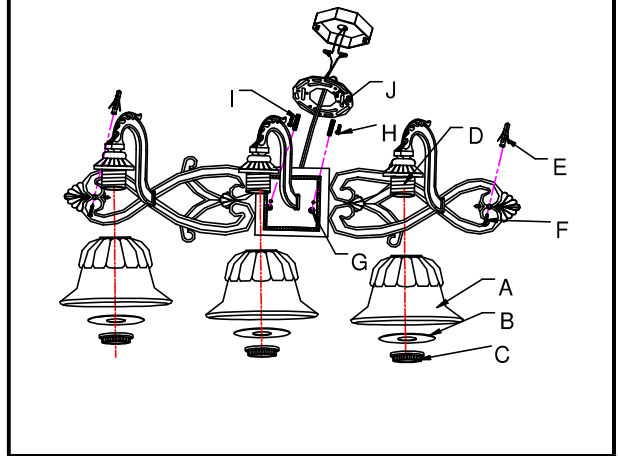


Fig. 2

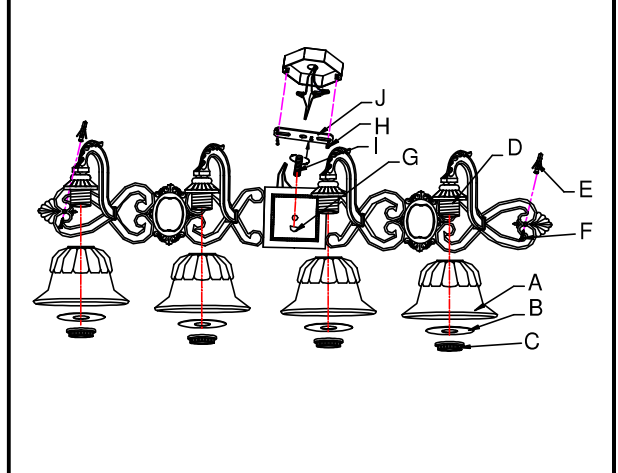


Fig. 3

