


ASSEMBLY/INSTALLATION INSTRUCTIONS:

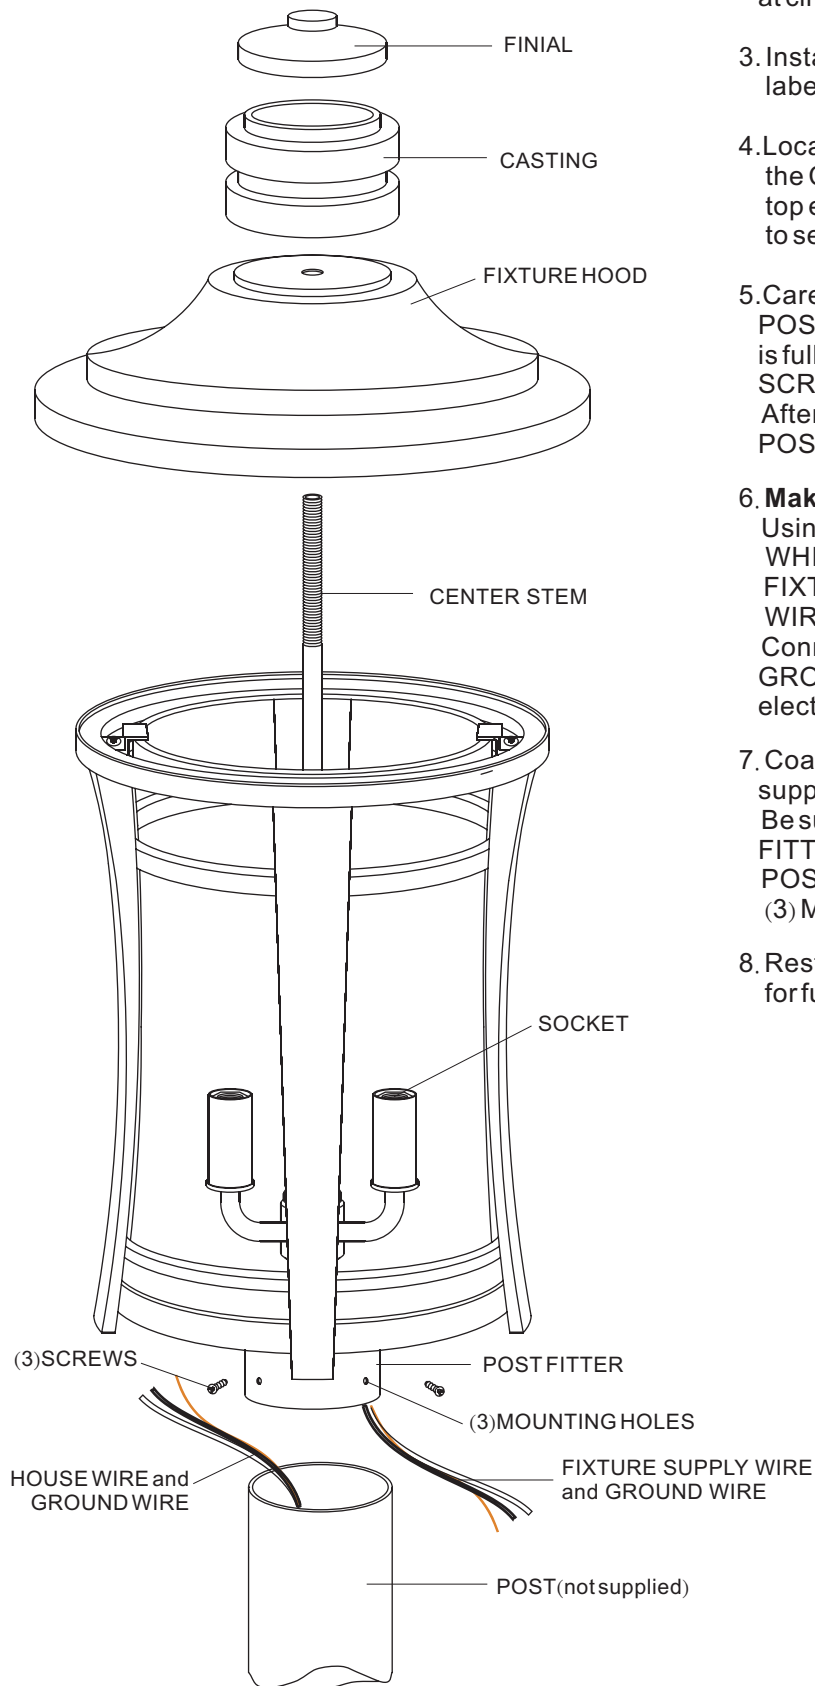

1. Before beginning the assembly/installation, carefully unpack and identify parts, referring to the illustration.
2. Turn the electrical power to the installation point OFF at circuit breaker.
3. Install the bulbs referring to fixture markings and/or labels for maximum wattage.
4. Locate the FIXTURE HOOD cover onto the top edge of the CAGE. Proceed to locate the CASTING over the top end of the CENTER STEM and thread the FINIAL to secure them. Hand tighten until snug.
5. Carefully fit the POSTFITTER over the end of the POST (not supplied), making sure the POSTFITTER is fully seated. Mark the drill point for the (3) MOUNTING SCREWS, using (3) MOUNTING HOLES as reference. After marking hole locations, remove FIXTURE from POST and drill 1/8" pilot holes for screws.
6. **Making the wiring connections:**
Using wire connectors (not supplied), connect the WHITE SUPPLY WIRE from the POST to the WHITE FIXTURE WIRE; connect the BLACK (or RED) SUPPLY WIRE from the POST to the BLACK FIXTURE WIRE. Connect the SUPPLY GROUND WIRE to the FIXTURE GROUND WIRE. Wrap each connection with approved electrical tape.
7. Coat the top 1" of the CLEAR SILICONE CAULK (not supplied) and position the POSTFITTER onto the POST. Be sure to seat it completely, aligning the holes in the FITTER with the 1/16" PILOT HOLES drilled into the POST. Secure the FIXTURE to POST with (3) MOUNTING SCREWS (supplied).
8. Restore power to installation point ON. Retain this sheet for future reference.