

ASSEMBLY AND INSTALLATION

(Please don't exceed the maximum capacity that recommended on the Sockets)

INSTRUCTION



Please read carefully and save this instruction, as you may need them at a later date.

CAUTION


Turn off the main power at the circuit breaker before installing the fixture, in order to prevent possible shock. If you are unfamiliar with proper electrical wiring connections, please consult of a qualified electrician before installing.

Installing Step:

Remove the fixture and the mounting package from the box and make sure that no parts missing in the box.

- 1 · Determine the desired hanging height and fasten the tubes(I) for each other by the nipple (J) onto the fixture body. Pass the wires carefully through inside of each stem as you assemble .
- 2 · Carefully pull wires through the stems into canopy (G) .
- 3 · Secure the mounting plate (C) to J-BOX and lock it by screws (F) .
- 4 · Unscrew the screws on driver(K) by a screwdriver ,open the metal cap ,wire the driver's positive and negative with power cord ,then cover the metal cap and lock the screws .
- 5 · Hold the lamp body ,and wire the lamp's positive, negative and ground wire into J-BOX and connect each by were connector.
- 6 · Attach the fixture body with canopy (G) onto the mounting bar (C) by protruding 2 mounting screws (B) through the mounting holes of the canopy (G) and secure for each other by 2 ball nuts (H) .

INSTALLATION IS NOW COMPLETED.

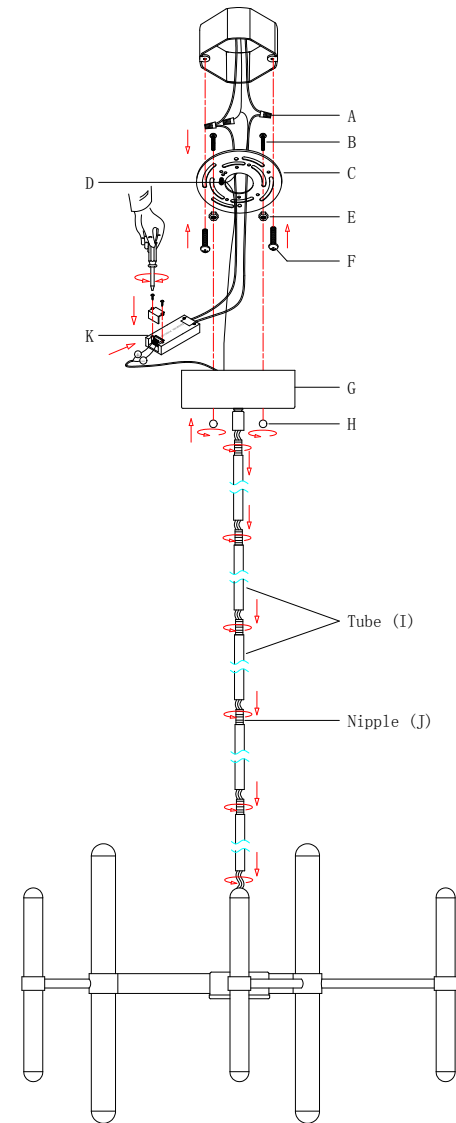

I-2600-18-322