

## ASSEMBLY AND INSTALLATION

### INSTRUCTION



*Please read carefully and save this instruction, as you may need them at a later date.*

### CAUTION

Turn off the main power at the circuit breaker before installing the fixture, in order to prevent possible shock. If you are unfamiliar with proper electrical wiring connections, please consult of a qualified electrician before installing.

### Installing Step:

Remove the fixture and the mounting package from the box and make sure that no parts missing in the box.


- 1 · Determine the desired hanging height and fasten the tubes(I) for each other by the nipple (J) onto the fixture body. Pass the wires carefully through inside of each stem as you assemble .
- 2 · Carefully pull wires through the stems into canopy (G) .
- 3 · Remove the swivel fittings from the canopy (G) by loosening the wing nuts (E) inside the canopy (G). Thread the swivels onto the top tubes you have installed on the fixture body .
- 4 · Unscrew the screws on driver(K) by a screwdriver ,open the metal cap ,wire the driver' s positive and negative with power cord ,then cover the metal cap and lock the screws .
5. Thread the wire and tubes into the canopy and fasten them with the wing nuts (E) .
- 6 · Secure the mounting plate (B) to J-BOX and lock it by screws (D) .
7. Hold the lamp body ,and wire the lamp's positive, negative and ground

wire into J-BOX and connect each by were connector.

8. Position the lamp body and fix entire lamp by screw(H) from the back plate(B) .

(Please don't exceed the maximum capacity that recommended on the Sockets)

INSTALLATION IS NOW COMPLETED.

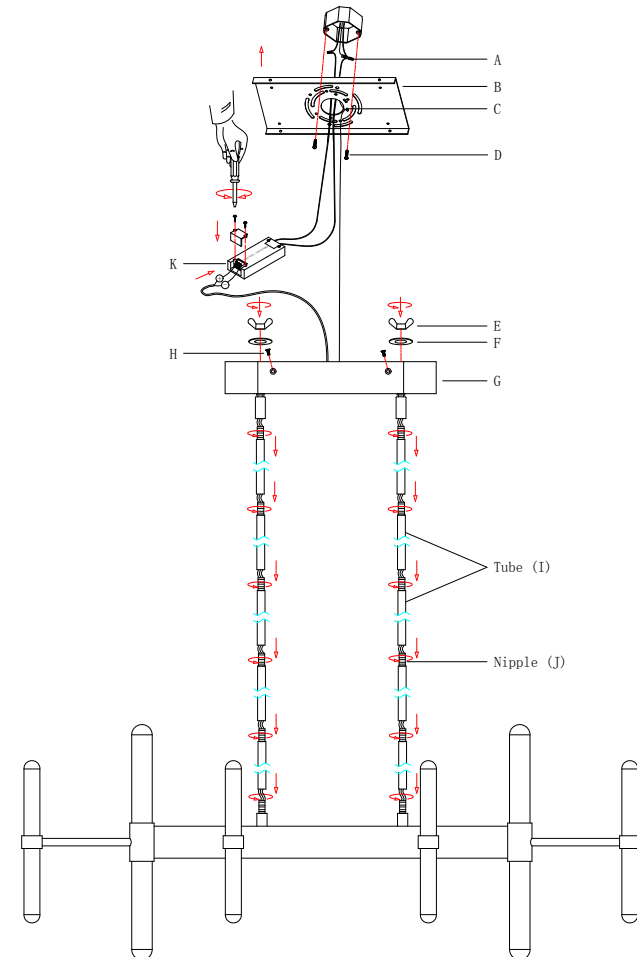

**I-2601-20-322**