

ASSEMBLY AND INSTALLATION INSTRUCTIONS

CH33015

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

- NOTE:**
1. Before installing, consult local electrical codes for wiring and grounding requirements.
 2. Supplied with 15 feet steel cord for hanging safety assurance. The way to install depends on your house structure.
 3. Please read the instruction carefully before you install this fixture. If you are not familiar with installations, please consult a qualified electrician.

Assemble Steps (See Fig. 1)

1. Thread the fixture wire, grounding wire and steel cord through the washer, hex nut, nipple-2, decoration, washer, hex nut and loop in order.
2. Screw the nipple-2 into the coupling, and then secure with a washer and a hex nut.
3. Attach the decoration onto the fixture by inserting the nipple-2, and then secure with a washer and a hex nut.
4. Secure the loop onto the nipple-2 tightly.

Installation Steps

1. Attach the nipple-1 to the mounting strap, and then secure with a washer and a hex nut.
2. Attach the mounting strap to the ceiling box by using two mounting screws.

NOTE: Apply drywall screws to strengthen the installation of the mounting strap onto the ceiling if in need. (See fig 2)

3. Choose the length of the chain that you need, and weave the fixture wire, grounding wire and steel cord through the chain links. Then connect one end link of the chain and the loop by using the loop lock. (See Fig.3)


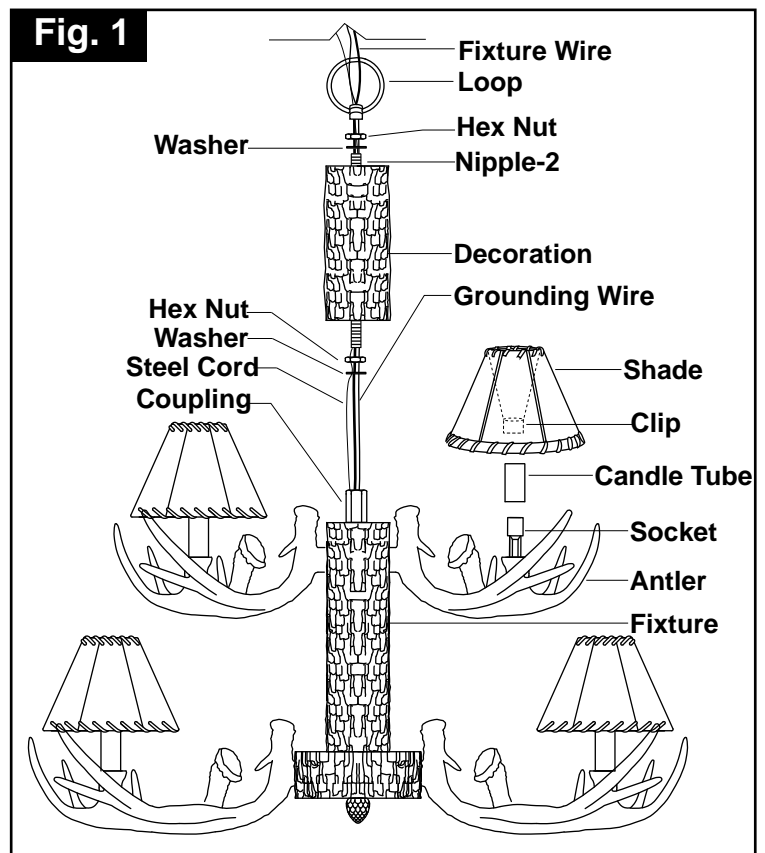



Figure 2

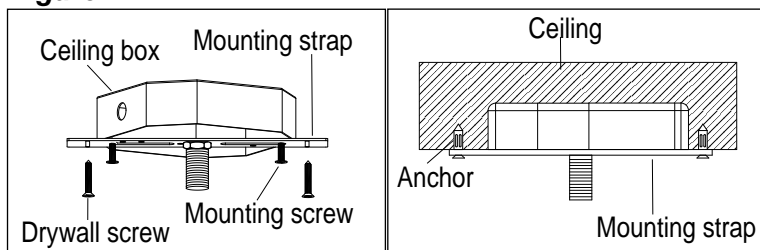

Before install

After install

Figure 3

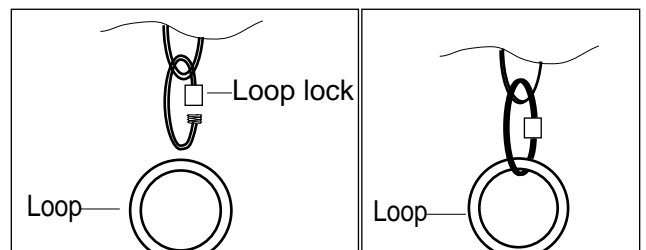

Before install

After install

4. Secure the top loop to the nipple-1.
5. Thread the fixture wire, grounding wire and the steel cord through the collar, canopy, top loop, nipple-1 and mounting strap in order.
6. Connect the other end link of the chain and the top loop by using the loop lock.
7. Make wire connections with wire nuts:
 - The smooth wire (marked) from fixture to the black wire from power source.
 - The ridged wire (unmarked) from fixture to the white wire from power source.
 - Attach the fixture grounding wire to the mounting strap with the green grounding screw. Then connect it to the house grounding wire with the wire nut.
 Carefully tuck wires back into the ceiling box.
8. Attach the canopy to the mounting strap by inserting the top loop, and then secure with the collar.
9. Attach the candle covers to the sockets, and then attach the clips of the shades onto the candle covers. (See Fig.1)
10. Install bulbs. **(Please do not exceed the maximum capacity that is recommended on the package.)**
11. Turn on the power at fuse or circuit box.

