

# ASSEMBLY AND INSTALLATION INSTRUCTIONS



CH55406 / CH55506 / CH55606 / CH55706

**WARNING: BE SURE TO SHUT OFF POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE INSTALLING OR SERVICING THIS FIXTURE.**

**NOTE: 1. Before installing, consult local electrical codes for wiring and grounding requirements.  
2. READ AND SAVE THESE INSTRUCTIONS.**



## Fixing the silhouette:

1. Take out the silhouettes from the package carefully. Loosen the set screws, but do not unscrew the set screws to prevent them lost.
2. Insert the silhouette(P-C) to the metal ring, and then fix it toward to the metal ring with the set screw. (See Fig.1)
3. Do the same way for fixing the silhouettes(P-B, P-E and P-C) in counterclockwise between two loops-3 in order.
4. Repeat Steps 2~3 to finish other silhouettes fixing.
  - a. The loops-3 divide the silhouettes fixing into three equal divisions. (See Fig.2)
  - b. Please according to Fig.2 shown to fix all the silhouettes whichever you fix first.
5. You can install the silhouettes which marked P-R (for CH55406) or marked P-S (for CH55706) or marked P-C & P-B (for CH55506) to the location of silhouettes which marked P-E (for CH55606) shown in Figure 2 to replace them.

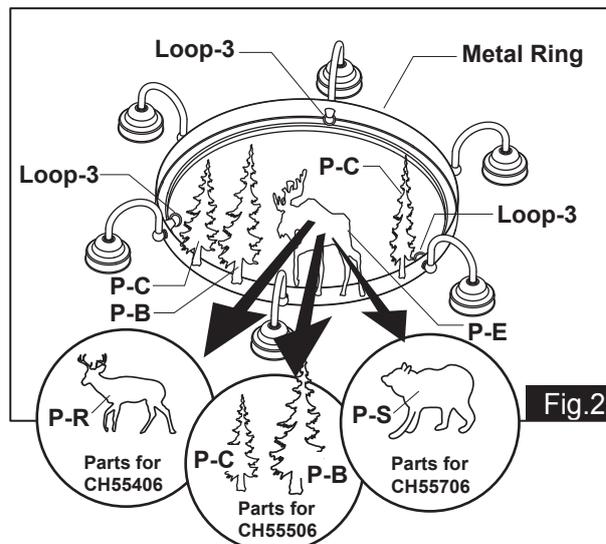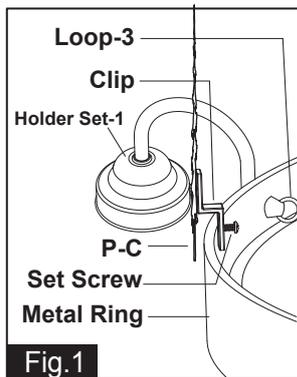

## Assembling the center glass shade:

1. Attach the center glass shade downward to the pan carefully. (See Fig.3)
2. Attach the assembled pan upward to the metal ring, make the hole on the metal ring and the hole on the pan overlap, and then secure with the set screws. (See Fig.4)

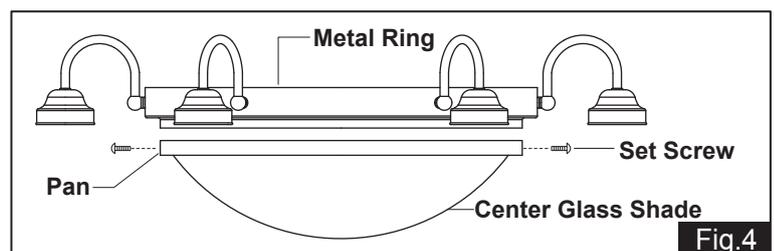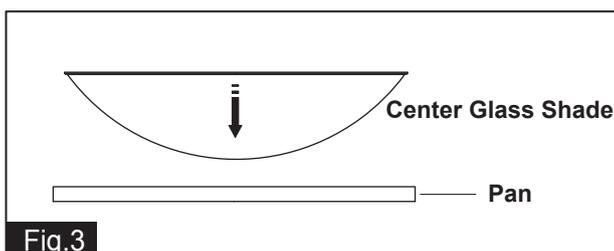

## Install the other parts:

1. Attach the nipple-1 to the mounting strap, and then secure it with a washer and a hex nut.
2. Attach the mounting strap to the outlet box by using two mounting screws.
3. Secure the loop-1 to the nipple-2 of the fixture tightly.
4. Choose the certain length of the chain you need, and then weave the fixture wire and the grounding wire through the chain. Then connect one end of the chain with the loop by using the loop lock.
5. Secure the top loop to the nipple-1 tightly.
6. Thread the fixture wire and fixture grounding wire through the collar, top loop, canopy-1, nipple-1 and mounting strap in order.
7. Connect the other end of the chain with the top loop by using the loop lock.
8. Pull out the outlet wires and house grounding wire from the outlet box. Make wire connections using the wire nuts:
  - The smooth wire (marked) from the fixture to the black wire from the power source.
  - The ridged wire (unmarked) from the fixture to the white wire from the power source.
  - Attach the fixture grounding wire to the mounting strap with the green grounding screw. Then connect it to the house grounding wire with a wire nut.
 Carefully put the wires back into the outlet box.
9. Attach the canopy-1 to the mounting strap by inserting the top loop, and then secure it with the collar.
10. Hook one end of the suspension rods to the loops-2, and then hook the other end of the suspension rods to the loops-3. (See Fig.5)
- Note: Make sure all the three suspension rods hook tightly each loops-2 and loops-3 one by one.**
11. Attach the side glass shades upward to the glass holders, and then secure them with socket rings.
12. Install bulbs (not included). See relamping label at socket area or packaging for maximum allowed wattage.
13. Turn on the power at the main fuse or circuit breaker box.

