
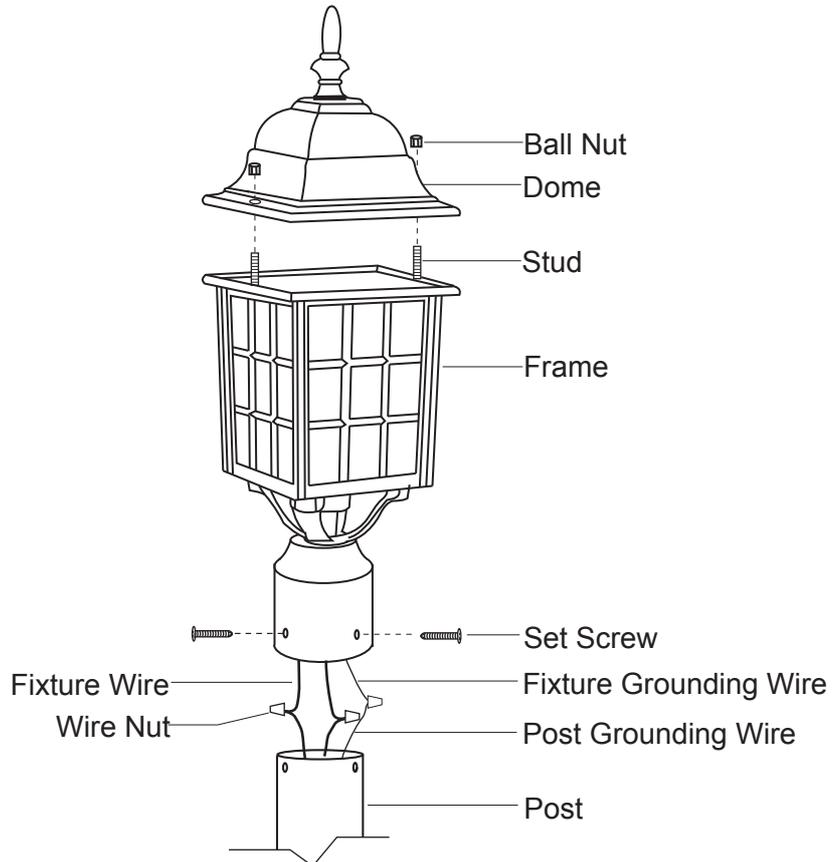
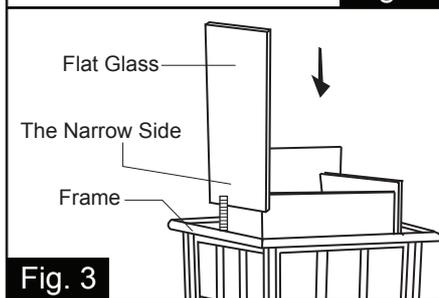
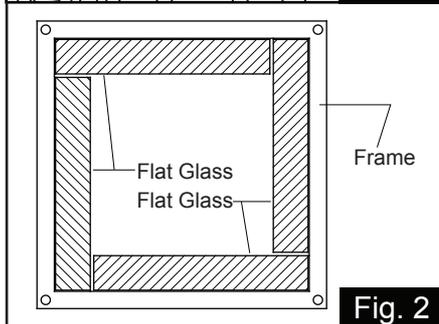


ASSEMBLY AND INSTALLATION INSTRUCTIONS

OP36765

WARNING: BE SURE TO SHUT OFF POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE INSTALLING OR SERVICING THIS FIXTURE.

**NOTE: 1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. READ AND SAVE THIS INSTRUCTION.**

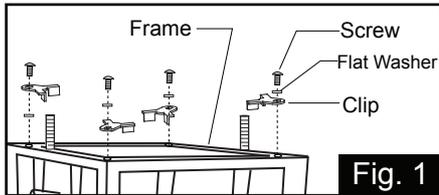

1. Unscrew the ball nuts and remove the dome away from the frame.
2. Unscrew and remove the screws, flat washers and clips from the frame. Place the flat glasses into the frame carefully, and then restore the screws, flat washers and clips back to secure the flat glasses. (See Fig.1 and Fig.3)
Note: To install the flat glasses correctly:
 - a. Slide the narrow sides of the flat glasses downward into the frame in turn. Place them into position as shown in Fig.2.
 - b. Place the rough side of the flat glass toward to outside.
3. Pull out the wires and grounding wire from the post. Make wire connections using the wire nuts:
 - The black wire from the fixture to the black wire from the post.
 - The white wire from the fixture to the white wire from the post.
 - The fixture grounding wire to the post grounding wire.Carefully tuck the wires back into the post.
4. Place the fixture on the post, then secure it with the set screws.
5. Install a bulb (not included). See relamping label at socket area or packaging for maximum allowed wattage.
6. Restore the dome back to the frame, and then secure it with ball nuts.
7. Turn on the power at the main fuse or circuit breaker box.