



Bulbs: 60W CAND.

# CASPIA

FR43759SLF

REPLACEMENT PARTS: R43754CRY; R43758CRY-A, R43784CRY-B  
R43759STR-B, R43759STR-C

## ASSEMBLY INSTRUCTIONS

Assembly of this fixture will be accomplished by first assembling the main fixture body, installing mounting hardware to junction box, mounting the fixture to the ceiling, and then mounting the crystals to the fixture.

**SAFETY WARNING:** Read wiring and grounding instructions [FRIS 18] and any additional directions. Turn power supply off during installation. If new wiring is required, consult a qualified electrician or local authorities for code requirements.


### STEP 1

- 1 Slip loop (2) along wire and thread onto to of center column of main body assembly (1) - see Drawing 1.
- 2 Slip candle sleeves (3) over sockets.
- 3 Take threaded tube (7) and slip parts cap (6), check ring (5), and tube (4) in that order. Now thread tube (7) into coupler (a) at bottom of main body (1). Tighten hex nut (8) against cap (6) to secure parts.
- 4 Fixture can now be hung from the ceiling please follow instruction sheet **FRIS-19** provided. After installation return to this section for crystal installation instructions.

### STEP 2

- 1 To attach bottom crystals slip cap (9) with crystals (10) attached onto threaded tube (7) and thread hex nut (11) onto threaded tube (7) and tighten to secure cap (9) and crystals (10) - see Drawing 1.
- 2 Thread finial (12) onto the end of threaded tube (7).
- 3 Fixture can be lamped at this time.
- 4 Start with one strand of crystals (10) and working around the ring (d) attach hook (b) on crystal strand into loop (c) hanging below ring (d).
- 5 To attach long strands hook bottom of strand (13) to loops (e) located inside of ring (d), then hook other end (f) to loop located at top of center column (i).
- 6 Hook small crystal spheres (14) to loops (h) located under the top scroll of the arms.
- 7 Hook large crystal spheres (15) to loops (g) located under the scroll below the candle cups.
- 8 Fixture is now complete.

[DRAWING 1]

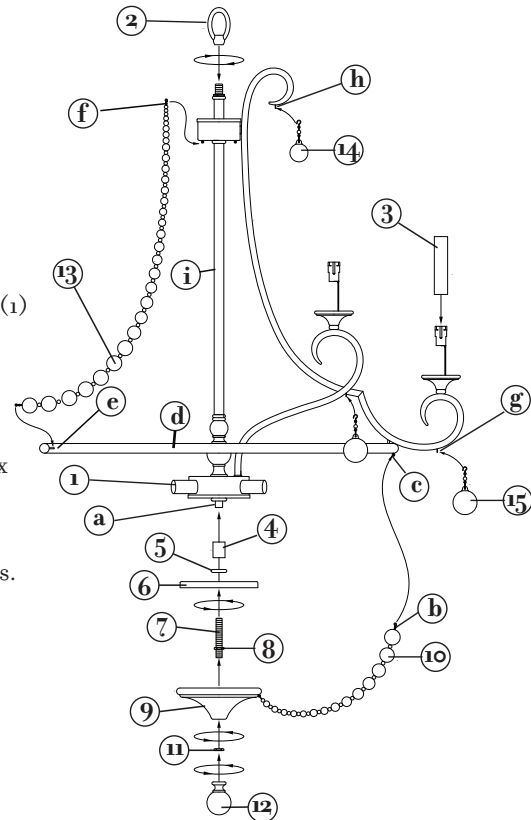

FREDRICK RAMOND  
ESTABLISHED 1965

800.421.3517 WWW.FREDRICKRAMOND.COM

6.01.11