



Family: Oxford | Item No. 1242 MN



Drawing 1 - Fixture Assembly

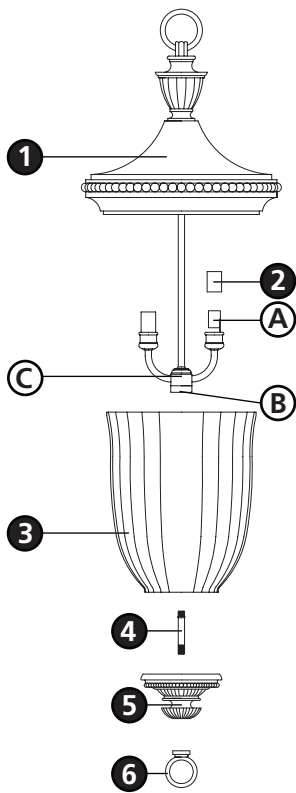

▼ start here

1

1. Find a clear area in which you can work.
2. Unpack fixture and glass from carton.
3. Carefully review instructions prior to assembly.

***** The construction of this fixture will be accomplished by first assembling the main body of the fixture, making all necessary electrical connections, and then hanging the fixture from the ceiling.**

2

1. To assemble fixture, slip candle sleeve (2) over socket (A) - see **Drawing 1**.
2. Thread center stem (4) into center hole (B) located at the base of cluster assembly (C).
3. Fixture can now be lamped accordingly.
4. Slip glass (3) over entire cluster assembly (C).
5. Slip bottom cup (5) onto center stem (4).
6. Thread bottom loop (6) onto center stem (4).

SAFETY WARNING: READ WIRING AND GROUNDING INSTRUCTIONS (I.S. 18) AND ANY ADDITIONAL DIRECTIONS. TURN POWER SUPPLY OFF DURING INSTALLATION. IF NEW WIRING IS REQUIRED, CONSULT A QUALIFIED ELECTRICIAN OR LOCAL AUTHORITIES FOR CODE REQUIREMENTS.

3

Make electrical connections from supply wire to fixture lead wires. Refer to instruction sheet (I.S. 18) and follow all instructions to make all necessary wiring connections. Then refer to the hanging instruction sheet (I.S. 19) provided to complete installation of this fixture.

Note: Maximum wattage for 1242 fixture is 40 watts per bulb.

2.7.08