



CASPIA

FR43751SLF

Bulbs: 60W CAND.

REPLACEMENT PARTS: R43753CRY; R43751STR-A

ASSEMBLY INSTRUCTIONS

Assembly of this fixture will be accomplished by first assembling the main fixture body, installing mounting hardware to junction box, mounting the fixture to the ceiling, and then mounting the crystals to the fixture.

SAFETY WARNING: Read wiring and grounding instructions [FRIS 18] and any additional directions. Turn power supply off during installation. If new wiring is required, consult a qualified electrician or local authorities for code requirements.

STEP 1

- 1 To assembly main body, slip parts (4), (3), and (2) in that order onto threaded tube (5).
- 2 Thread tube (5) into coupler (a) in center of main body assembly (1).
- 3 Tighten hex nut (b) to secure parts to body. Fixture can now be mounted to ceiling.


STEP 2

- 1 Prepare mounting strap (a) by threading the two long mounting screws (b) into the back of the mounting strap (a), making sure the holes into which the screws are threaded match the spacing of holes (d) in the canopy (e) - See Drawing 2.
- 2 Attach mounting strap (a) to junction box (j) using two screws (c).
- 3 Make electrical connections from supply wire to fixture lead wires. Refer to instruction sheet [FRIS18] and follow all instructions to make all necessary wiring connections. Then refer back to this sheet to continue installation of this fixture.
- 4 To mount fixture, slip the two mounting screws (b) through the two mounting holes (d) in the canopy (e).
- 5 While holding fixture in place, thread the two ball knobs (f) on to the end of the mounting screws (b), and tighten.


STEP 3

- 1 To attach crystal strands (9), lift body (6) with crystals and slip onto threaded tube (5) and thread on hex nut (7) to secure to bottom of fixture -see Drawing 1.
- 2 Thread bottom finial (8) onto end of threaded tube (5) and tighten.
- 3 Fixture can now be lamped accordingly.
- 4 Now starting at one end, Take hook (c) and hook it to the loop (d) on the bottom of half ring (e).
- 5 Fixture is now complete.

[DRAWING 1]

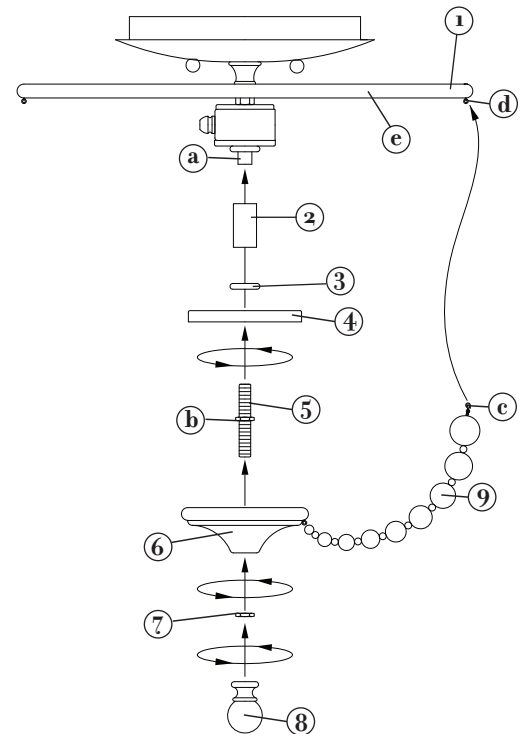

[DRAWING 2]

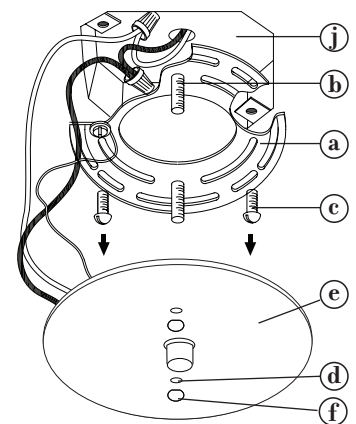

FREDRICK RAMOND
ESTABLISHED 1965

800.421.3517 WWW.FREDRICKRAMOND.COM

6.01.11