

CRYSTORAMA

1958



95 Cantiague Rock Road, Westbury NY 11590

Ph: 516.931.9090 fax: 516.931.1254

info@crystorama.com www.crystorama.com

MODEL#: 8200-FB

ASSEMBLY AND DRESSING INSTRUCTION

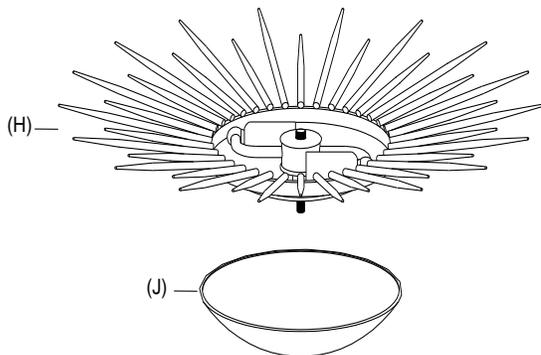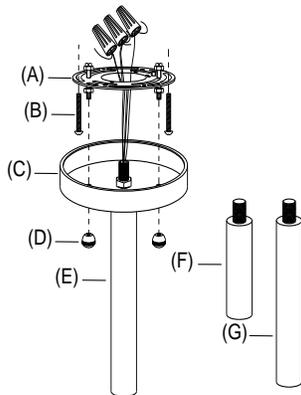


SCONCE OPTION:


Take off the (E) rod and replace by (F) rod as a Sconce.

PARTS ENCLUDED

(A) Mounting plate	(H) Light fixture
(B) Mounting screw	(J) Cover
(C) Canopy	
(D) Canopy ring	
(E) Lamp pole	
(F) Pole	
(G) Pole	



All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.



WARNINGS:

Turn off power (unplug from the wall outlet) before replacing the bulb(s), making sure the bulb(s) had sufficient time to cool down. DO NOT subject the lamp to any shock while lit as shattering of lamp may result.

TO ASSEMBLE:

1. Carefully remove all parts from the box and remove all plastic covering.
2. Turn off power to the junction box where the pendant will be installed.
3. Remove mounting plate (A) from canopy (C) by unscrewing cap nuts (D).
4. Attach mounting plate (A) to ceiling outlet box and secure with mounting screws (B).
5. Remove cover (J) from light fixture (H) by turning cover (J) in counter clock-wise direction.
6. According the desired hanging height to choose one or two lamp poles (F) & (G) to thread it or them to the bottom opening of lamp pole (E).
7. Thread the top nipple of light fixture (H) to the bottom opening of lamp pole (F) or (G).
8. Insert the recommended 60-watt Type B bulbs (not included) into the threaded sockets.
9. Replace the cover (J) to the bottom nipple of light fixture (H) by turning cover (J) in clock -wise direction.
10. Gently pull wires from ceiling outlet box and allow the wires to hang.
11. Attach the fixture ground wire to the ground wire from the outlet box (usually green or bare wire) with a plastic wire connector and wrap the connection with electrical tape.
12. Connect the hot wire to the hot outlet box wire (usually black) with a plastic wire connector and wrap the connection with electrical tape.
13. Connect the neutral wire to the neutral outlet wire (usually white) with a plastic wire connector and wrap the connection with electrical tape.
14. Tuck these wire connections neatly into the ceiling outlet box.
15. Attach canopy to affixed mounting plate (A), letting the

CRYSTORAMA

1958

95 Cantiague Rock Road, Westbury NY 11590

Ph: 516.931.9090 fax: 516.931.1254

info@crystorama.com www.crystorama.com

rods on mounting plate (A) pass through the holes of canopy (C) and secure with cap nuts (D).

16. Restore power to the junction box and test the pendant fixture.

17. Assembly is complete.

CARE INSTRUCTIONS:

To clean, use a soft cloth only. DO NOT use any chemical or abrasive cleaners.